

CSS Layout from the inside out

Rachel Andrew, FITC, October, 2021



The Holy Grail

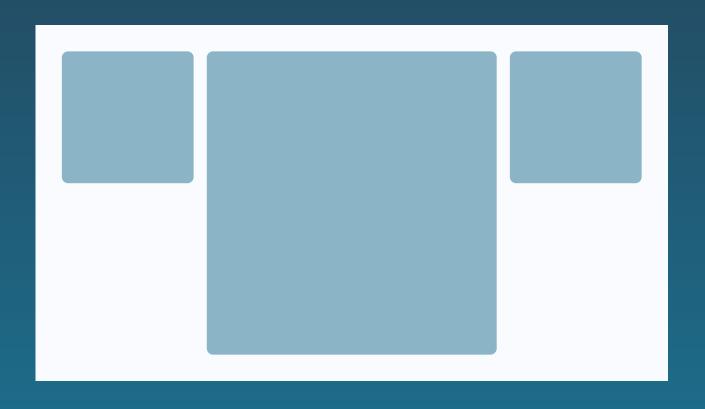

target / context = result

Fluid Grids, Ethan Marcotte, A List Apart, 2009.

960 Grid System



A float-based grid

Size things with % and push them around to look like a grid.

This is box a.

This is box b.

This is box c.
With two lines of text.

```
.box {
  float: left;
}
.a { width: 225px; }
.b { width: 150px; }
.c {width: 300px; }
```

The biggest problems in (float-based) web design?

Clearing floats and getting equal height columns.

A flex-based grid

Size things with % and push them around to look like a grid (but with equal height columns)

This is box a.

This is box b.

This is box c. With two lines of text.

```
.wrapper {
  display: flex;
box {
 flex: none;
.a { width: 225px; }
.b { width: 150px; }
.c {width: 300px; }
```

The biggest problem in (flex-based) web design?


Flexbox being weird and hard.

This is box a.

This is box b.

This is box c. With two lines of text.

```
.wrapper {
   display: grid;
   grid-template-columns: repeat(12,minmax(0,1fr);
}
.a { grid-column: auto / span 3; }
.b { grid-column: auto / span 2; }
.c {grid-column: auto / span 4; }
```

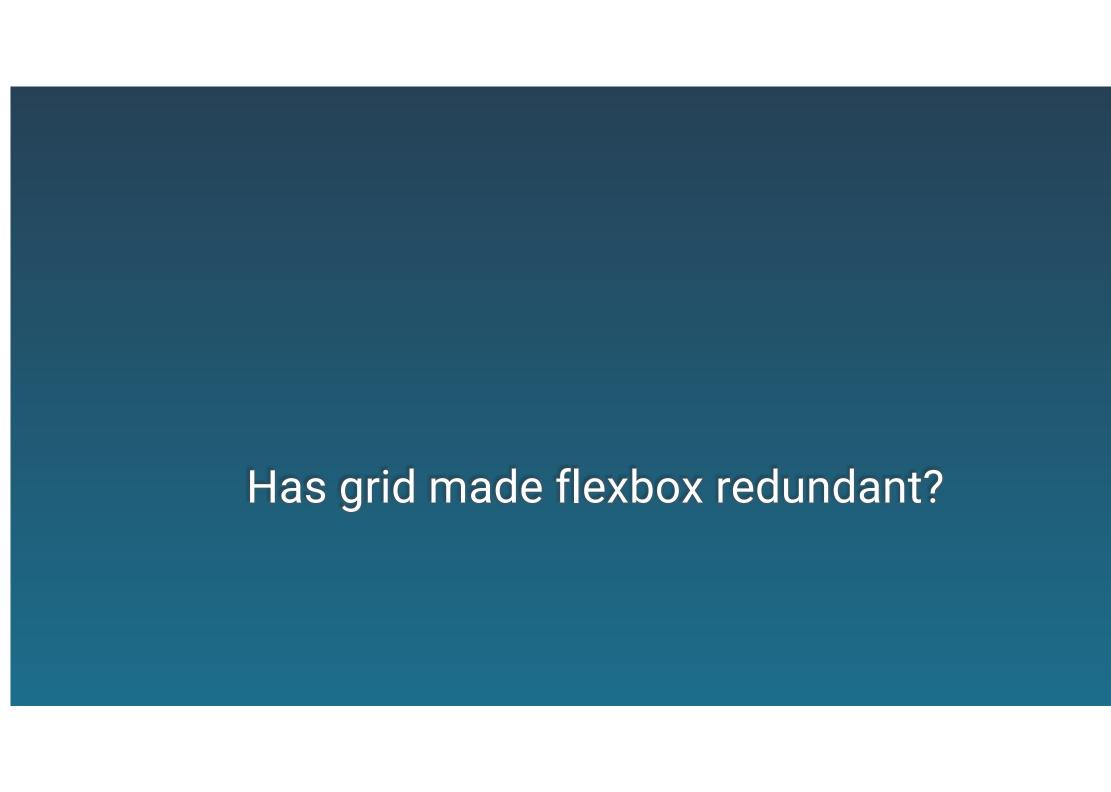

 Cat
 Pleasing fungus beetle
 Pigeon
 Rhinoceros
 Tasselled Wobbegong
 Elk

 Elephant

Pleasing fungus beetle

Pigeon Rhinoceros Tasselled Wobbegong Elk Elephant

 Cat
 Pleasing fungus beetle
 Pigeon
 Rhinoceros
 Tasselled Wobbegong
 Elk
 Elephant

 Cat
 Pleasing fungus beetle
 Pigeon
 Rhinoceros
 Tasselled Wobbegong
 Elk

```
.grid {
   display: grid;
   grid-template-columns:
     repeat(6,minmax(0,1fr));
}
```

Cat Pleasing fungus beetle

Pigeon

Rhinoceros

Tasselled Wobbegong Elk

Elephant

minmax(0,1fr)

Cat Pleasing fungus beetle Pigeon Rhinoceros Elk

Elephant

minmax(auto,1fr)

Heading decorations

Heading decorations

```
.h1 {
   display: grid;
   grid-template-columns: 1fr auto 1fr;
}

h1::before, h1::after {
   content: "";
   border-top: 1px solid var(--charcoal);
   align-self: center;
}
```

Aspect Ratios

The "padding hack"

https://css-tricks.com/aspect-ratio-boxes/

aspect-ratio: 16/9;

..... 16x9 16x9 4x3 4x3

```
wrapper {
 display: grid;
 grid-template-columns: 200px 350px;
box16x9 {
 aspect-ratio: 16/9;
box4x3 {
 aspect-ratio: 4/3;
```

CSS Containment

This box and children are independent from the rest of the layout.

```
sidebar {
  contain: layout;
}
```

Container Queries

Design components that can react to the available space in their container.

Try out Container Queries

In chrome://flags enable "CSS Container Queries".

```
sidebar {
  container-type: inline-size;
}
```

Using container-type creates a containment context.

This also turns on layout, style, and inline-size containment, in the same way as using the contain property does.

```
.sidebar {
  container-type: inline-size;
  container-name: sidebar;
}
```

```
@container (min-width: 400px) {
     card {
        display: grid;
        grid-template-columns: 1fr 2fr;
     }
}
```

```
@container sidebar (min-width: 400px) {
     card {
        display: grid;
        grid-template-columns: 1fr 2fr;
     }
}
```



One Two Three Four

```
.wrapper > div {
  container-type: inline-size;
}

@container (min-width: 220px) {
    .box {
    background-color: var(--blue-sapphire);
  }
}
```

This seems so simple! Why did it take so long?

RenderingNG deep-dive: LayoutNG

Published on Friday, October 8, 2021





This post is a part of a series on the Chromium rendering engine. Check out the rest of the series to learn more about <u>RenderingNG</u>, <u>the architecture</u>, <u>key data structures</u>, and VideoNG.

I'm Ian Kilpatrick, an engineering lead on the Blink layout team, along with Koji Ishii. Before working on the Blink team, I was a front-end engineer (before Google had the role of "front-end engineer"), building features within Google Docs, Drive, and Gmail. After around five years in that role I took a large gamble switching to the Blink team, effectively learning C++ on the job, and attempting to ramp up on the massively complex Blink codebase. Even today, I only understand a relatively small portion of it. I'm grateful for the time given to me during this period. I was comforted by the fact a lot of "recovering front-end engineers" made the transition to being a "browser engineer" before me.

Table of contents

A 30,000 foot view of layout engine architectures

Types of layout bugs

Correctness

Under-invalidation

Hysteresis

Over-invalidation and performance

In summary

```
.sidebar {
  container: inline-size / sidebar;
}
```

```
feature {
  container-type: block-size;
  container-name: feature;
}
```

Black bean chili dip with tomato and basil zesty tofu pad thai parsley street style Thai basil tacos chili guacamole one bowl elderberry Italian linguine puttanesca mediterranean dragon fruit peanut butter crunch blackberries broccoli lemonade zest green bowl veggie burgers eating together tabasco pepper couscous bruschetta four-layer citrusy miso dressing oranges.

Black bean chili dip with tomato and basil zesty tofu pad thai parsley street style Thai basil tacos chili guacamole one bowl elderberry Italian linguine puttanesca mediterranean dragon fruit peanut butter crunch blackberries broccoli lemonade zest green bowl veggie burgers eating together tabasco pepper couscous bruschetta four-layer citrusy miso dressing oranges.

Container Queries are coming

But they probably aren't the solution to all your problems.

Remember than flexbox is designed for flexible things

A bunch of different sized items, within an unknown container size, dealt with as a group.

Use intrinsic and range sizing methods with grid

minmax(), min-content, max-content, auto, and fit-content()

But, do get excited for Container Queries!

Try it out! If you spot any issues or think of a potential enhancement, let the CSS Working Group know:

Thank you!

Find me @rachelandrew

Slides at: https://noti.st/rachelandrew