


BEST PRACTICES IN IMPLEMENTING CONTAINER IMAGE PROMOTION PIPELINES

A still from the movie "The Happening" featuring M. Night Shyamalan. He is in a nuclear bunker, wearing a grey jumpsuit, with a large black cylindrical object on his back. He is making peace signs with both hands and has a surprised expression. The word "CONTAINERS" is overlaid in the center.

CONTAINERS

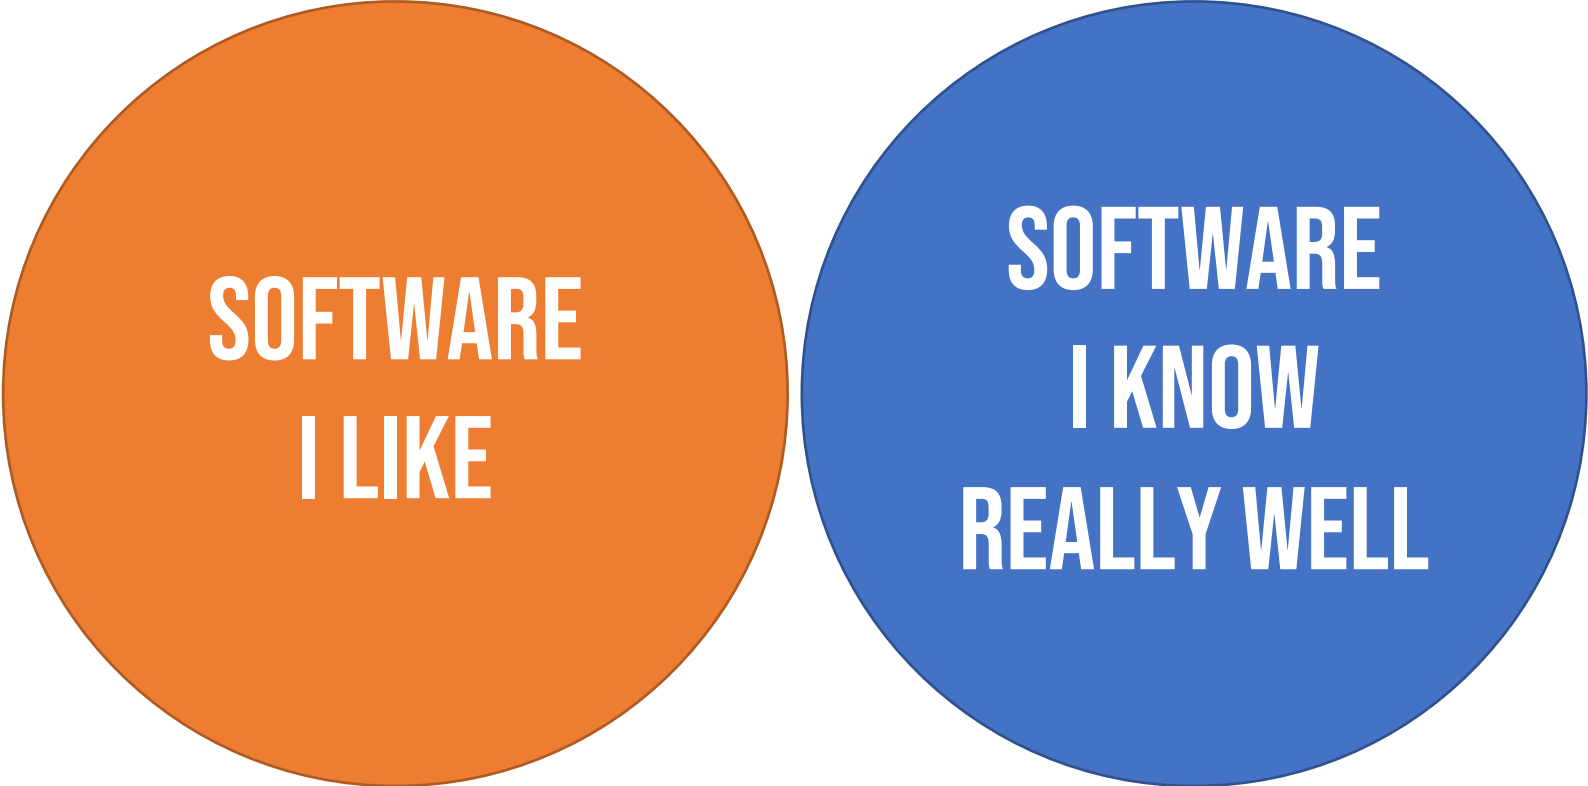

**SOFTWARE
I LIKE**

**SOFTWARE
I KNOW
REALLY WELL**

I LIKE YOU



BUT I DON'T TRUST YOU

BARUCH SADOGURSKY

CHIEF STICKER OFFICER

(ALSO 🎩 OF DEVELOPER ADVOCACY)



JBARUCH@JFROG.COM




@JBARUCH



+1(408)890-9281



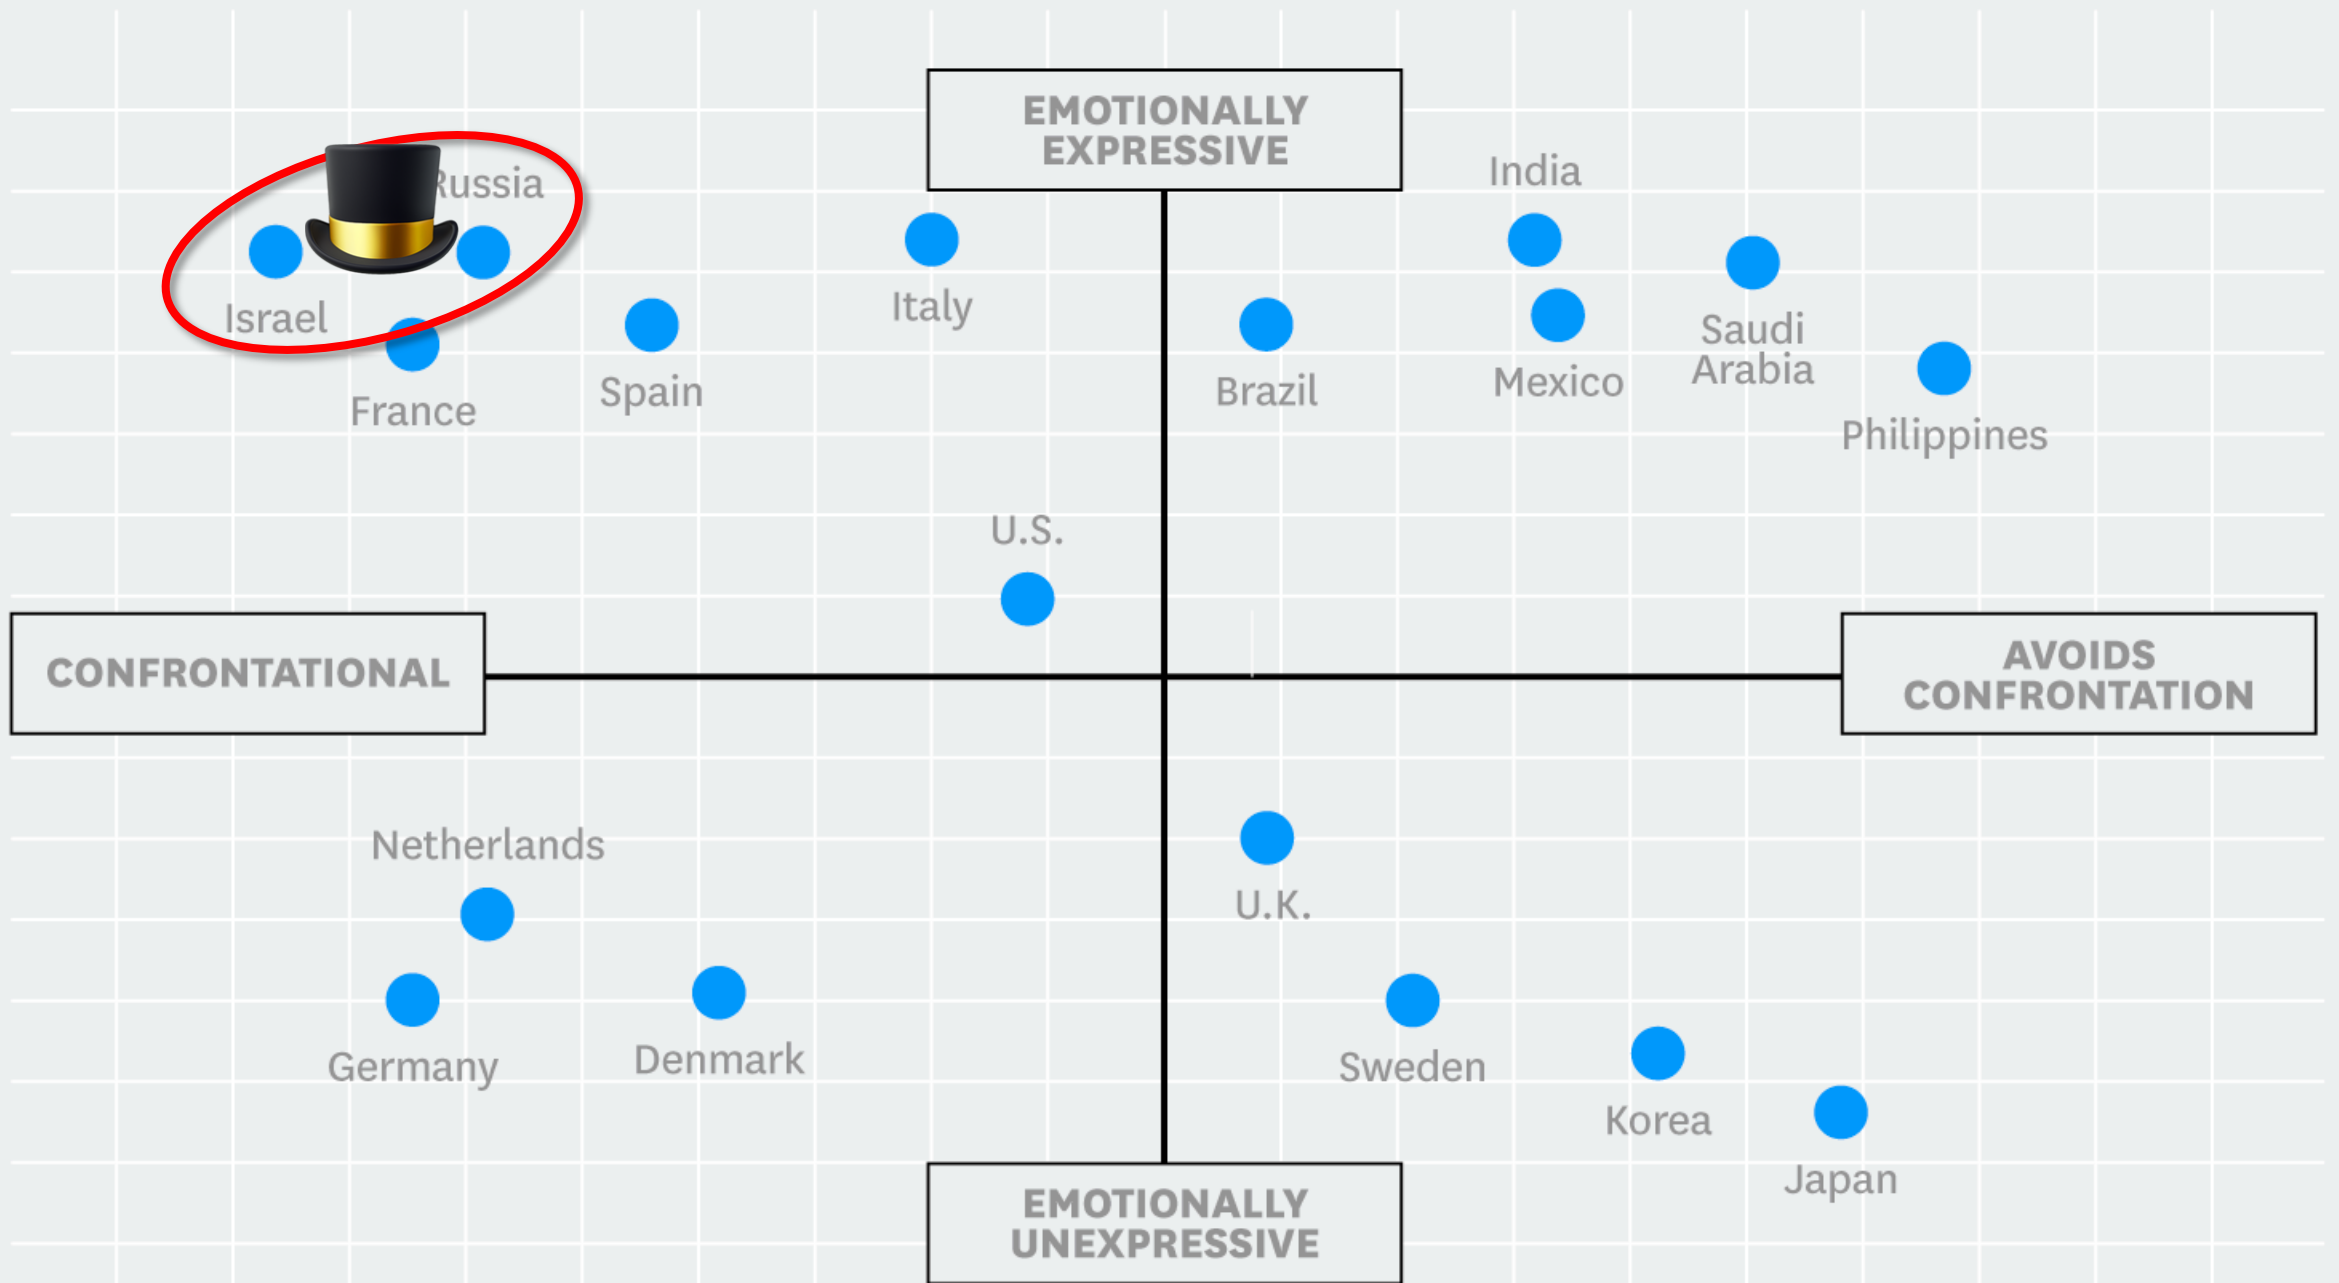

SHOWNOTES

➤ <http://jfrog.com/shownotes>

➤ Slides

➤ Video

➤ Links


➤ Comments, Ratings

➤ Raffle

DO WE HAVE AN EXISTING PATTERN?


DO WE NEED TO ADAPT IT?

CI/CD PIPELINES?

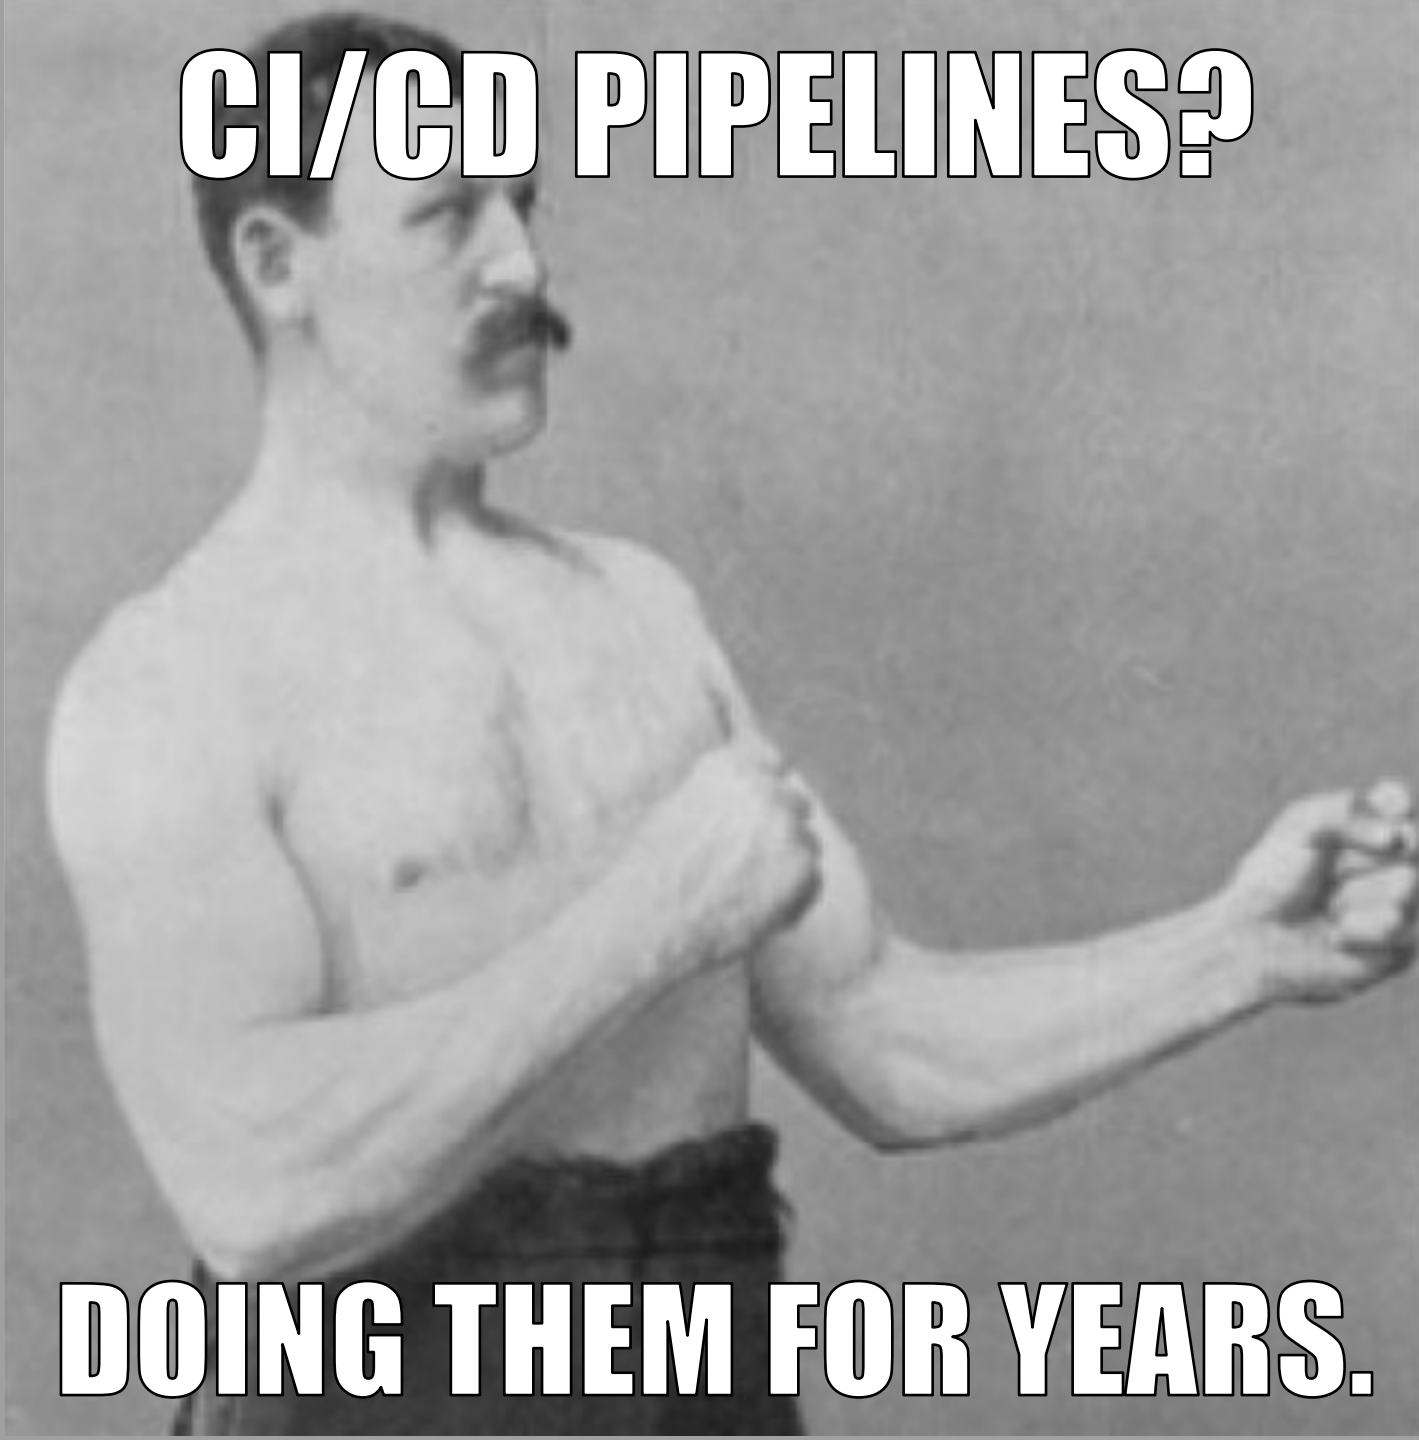


DOING THEM FOR YEARS.

THE PROMOTION PYRAMID

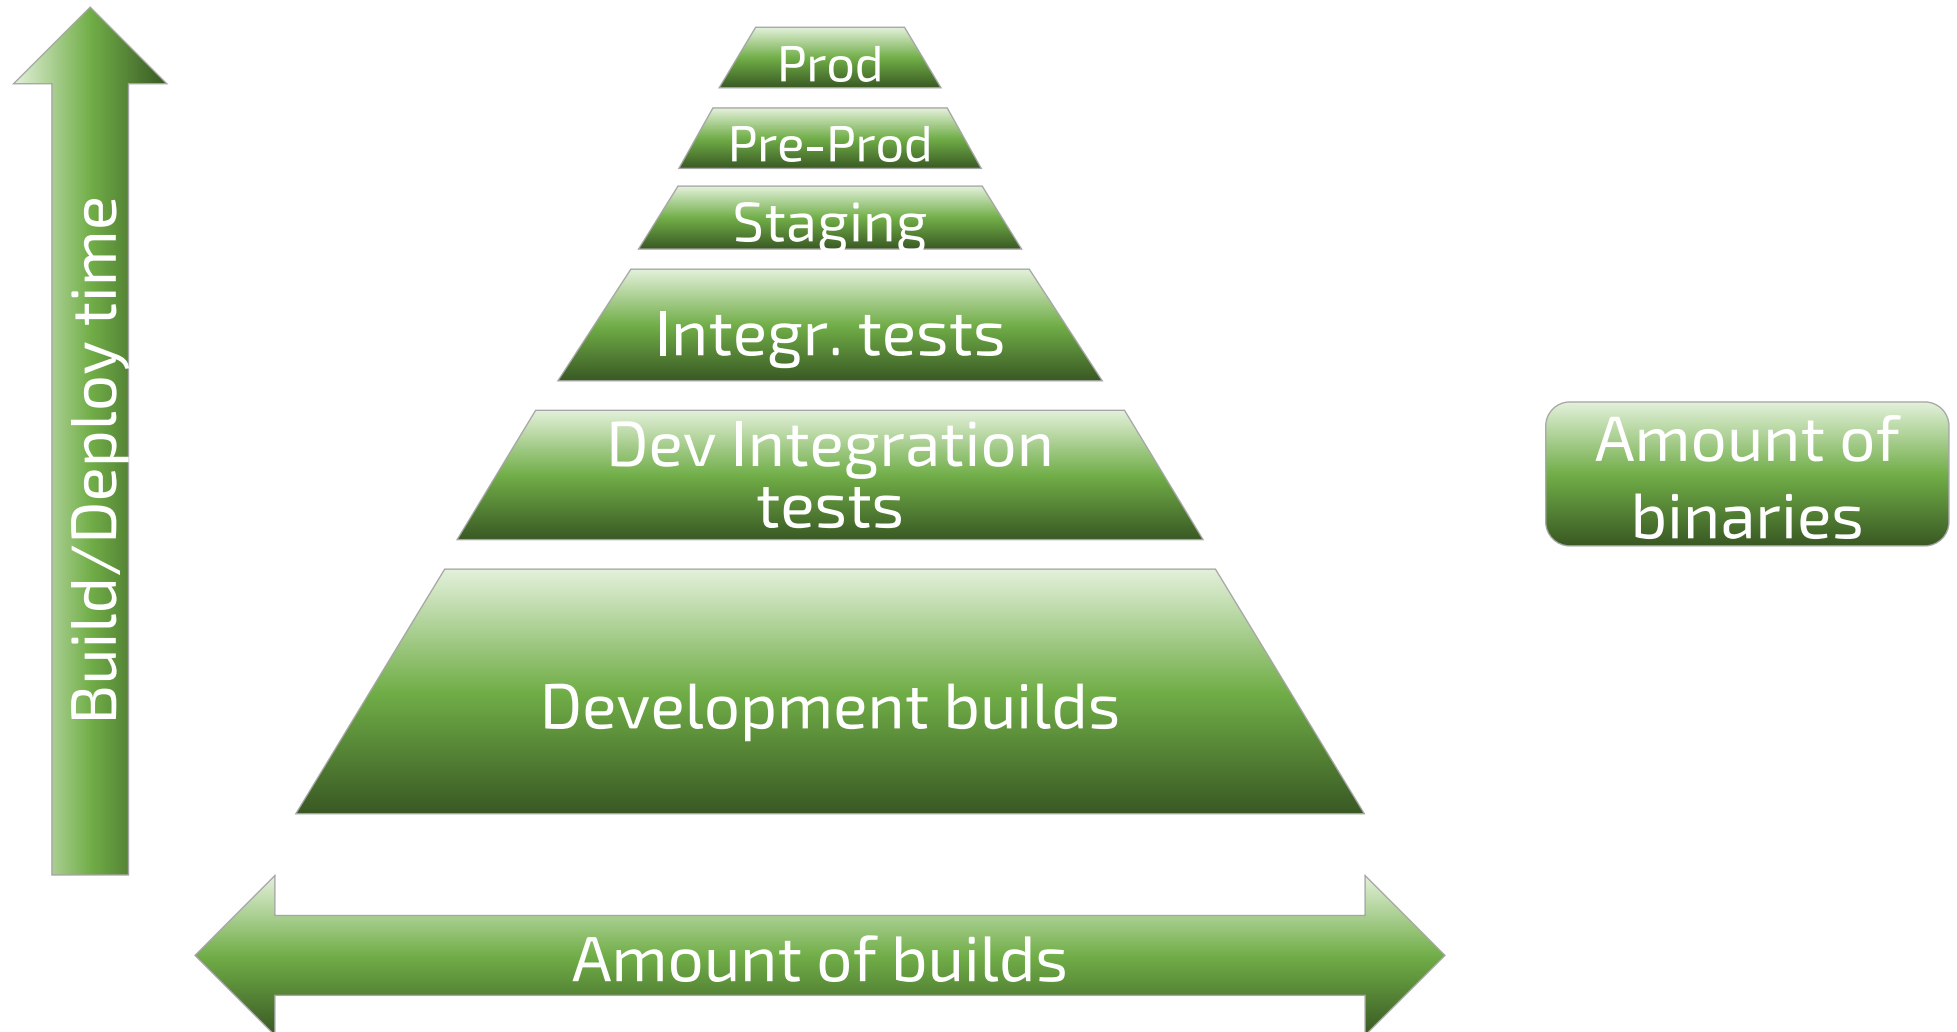

PIPELINE: QUALITY GATES AND VISIBILITY

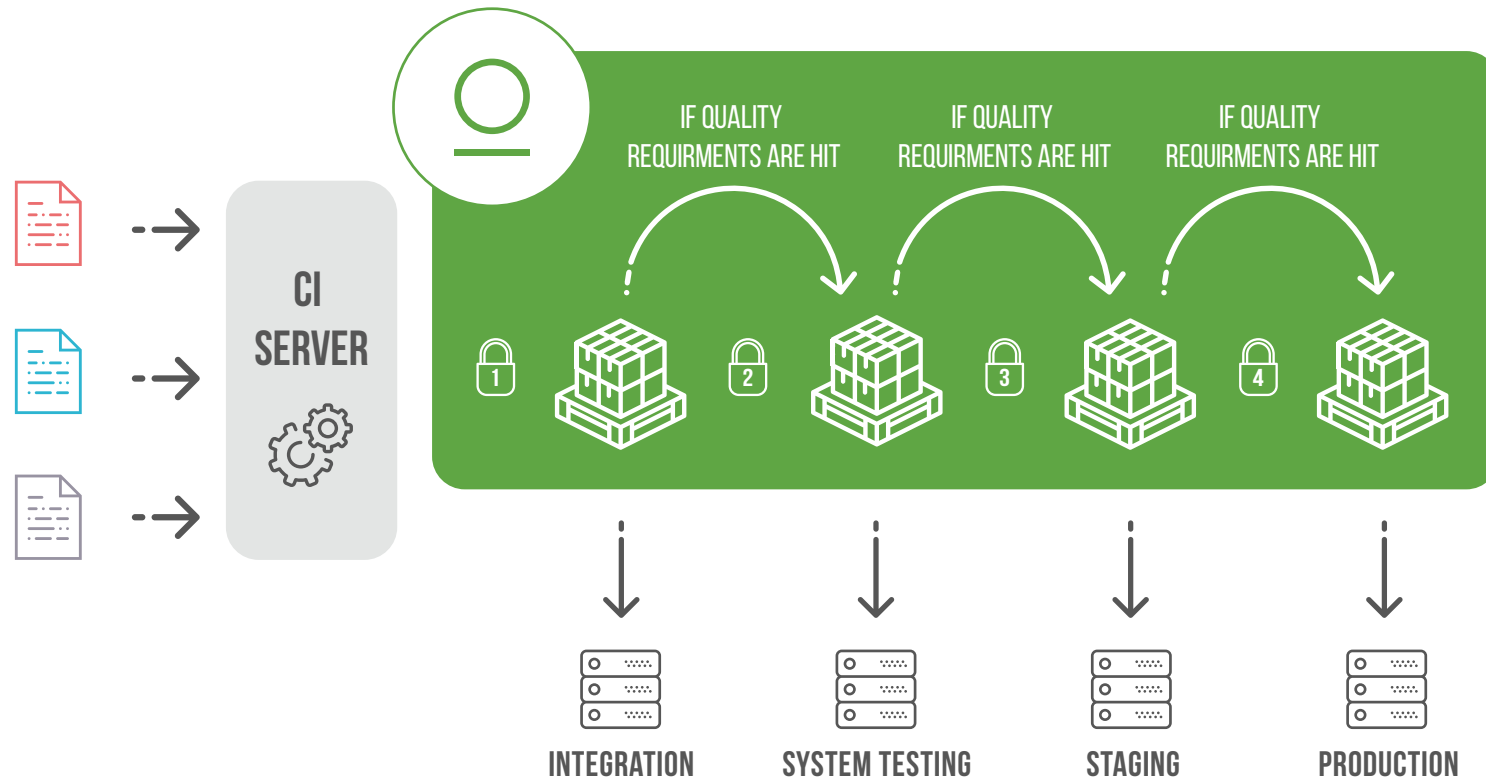

\$docker build




@jbaruch

#DeveloperWeek


<http://jfrog.com/shownotes>

DOCKER BUILD

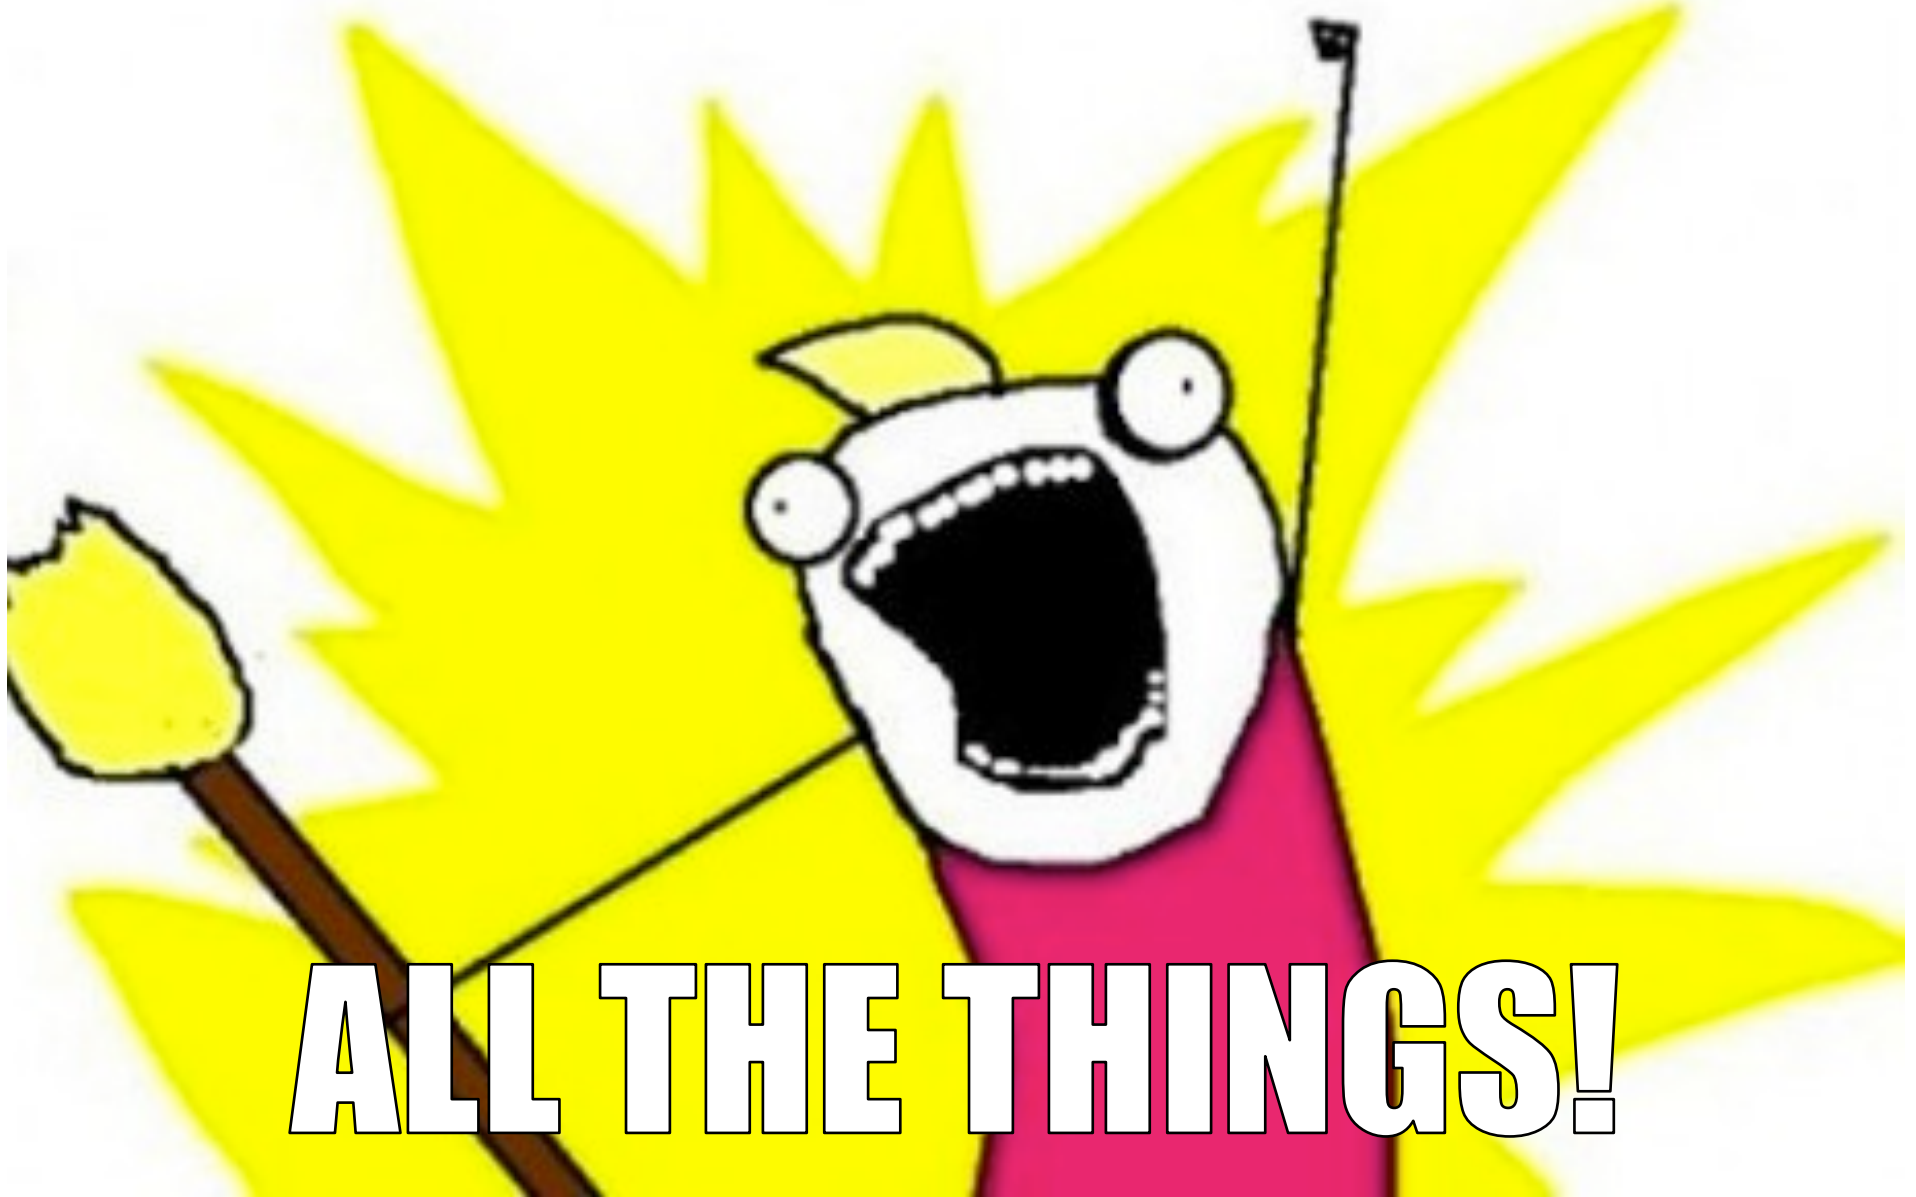

ALL THE THINGS!

LET'S docker build **IN EVERY ENV!**

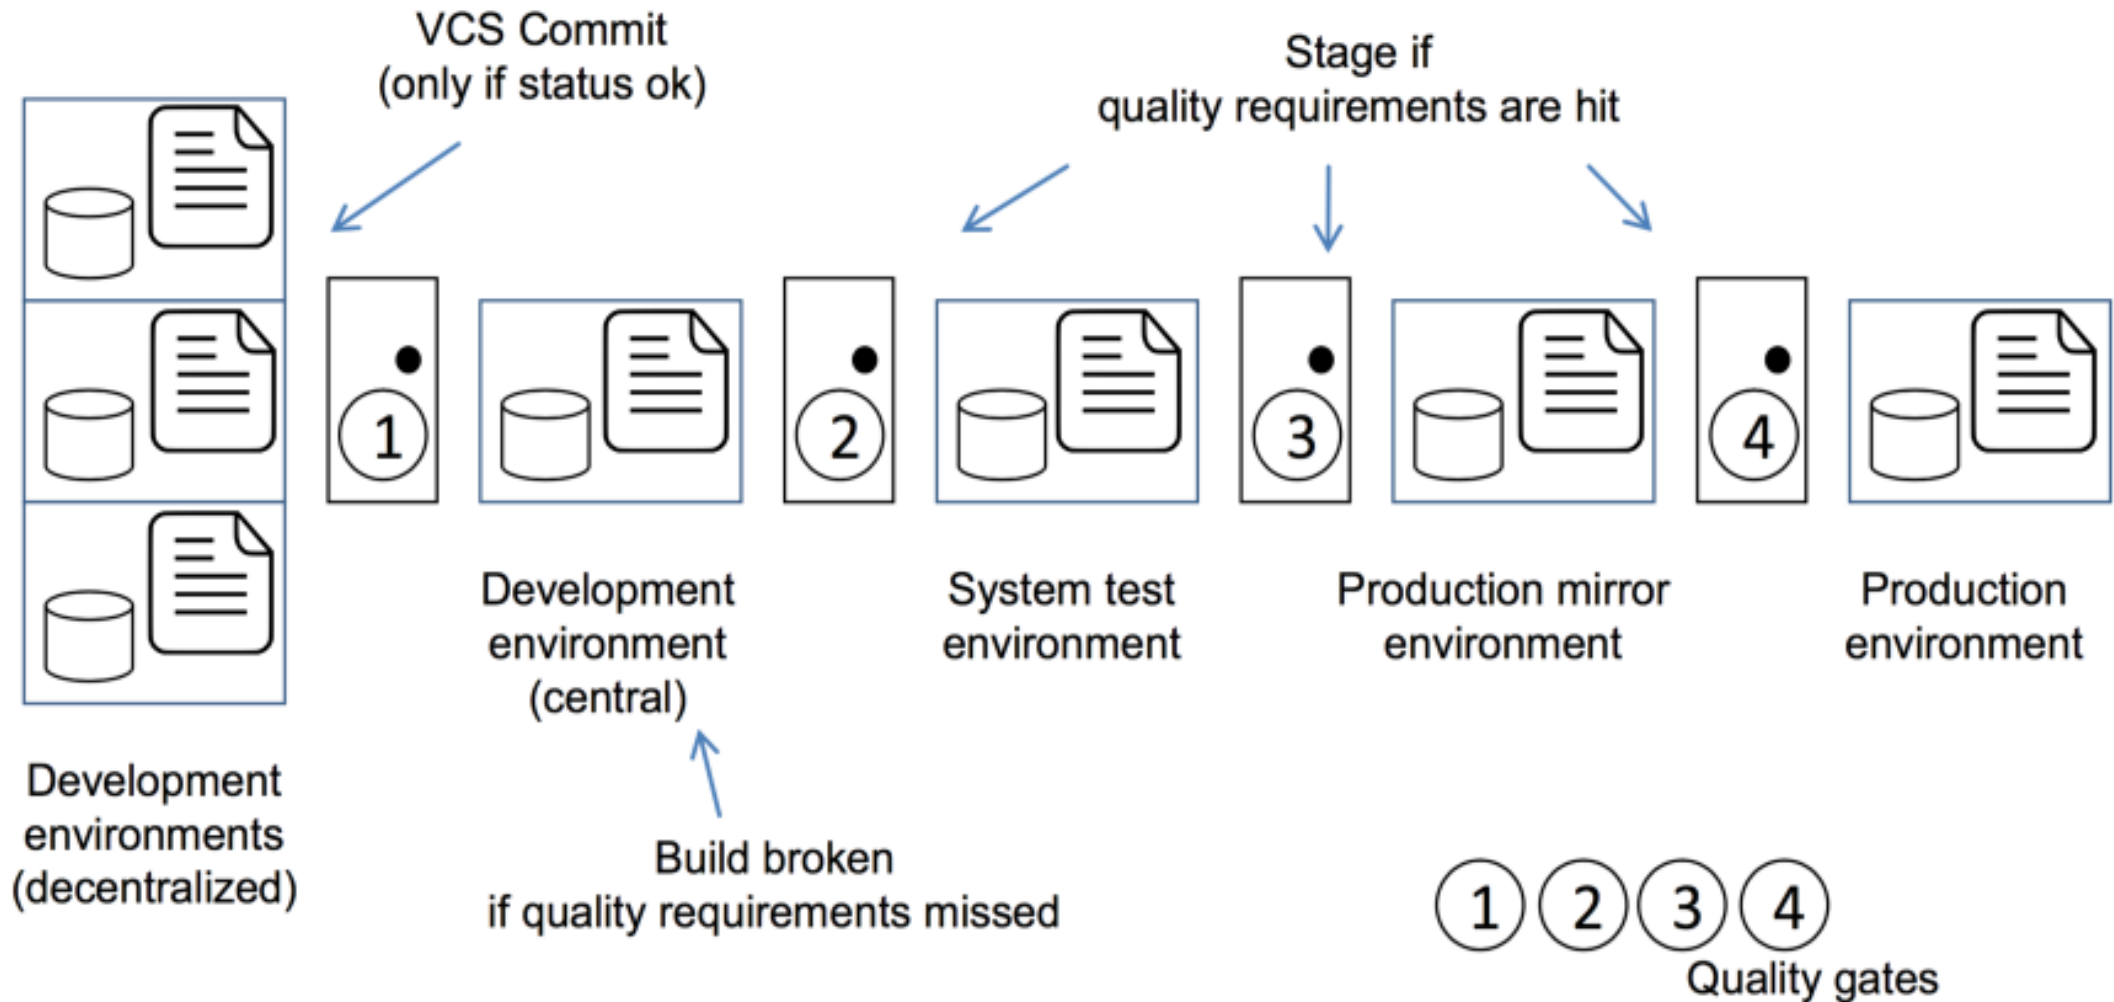

FAST AND CHEAP BUILDS

NOT ALWAYS THE WAY TO GO



THAT'S WHY.

FROM ubuntu  Latest version

RUN apt-get install -y software-properties-common python


RUN apt-get install -y nodejs

RUN mkdir /var/www

 Latest version

ADD app.js /var/www/app.js

 Latest version

 Latest version

CMD `["/usr/bin/node", "/var/www/app.js"]`

THAT'S WHY.

FROM ubuntu:19.04

Better now?

RUN apt-get install -y software-properties-common python

RUN apt-get install -y nodejs

RUN mkdir /var/www

ADD app.js /var/www/app.js

CMD ["/usr/bin/node", "/var/www/app.js"]

THAT'S WHY.

FROM ubuntu:4033353383af19ec179c01dda7f355a246c6adcafaf93c8f98

And now?

RUN apt-get install -y software-properties-common python

RUN apt-get install -y nodejs

RUN mkdir /var/www

ADD app.js /var/www/app.js

CMD ["/usr/bin/node", "/var/www/app.js"]

THAT'S WHY.

FROM ubuntu:4033353383af19ec179c01dda7f355a246c6adcafaf93c8f98

RUN apt-get install -y software-properties-common python

RUN apt-get install -y nodejs

RUN mkdir /var/www



What about those?


ADD app.js /var/www/app.js

CMD ["/usr/bin/node", "/var/www/app.js"]

THAT'S WHY.

FROM `ubuntu:4033353383af19ec179c01dda7f355a246c6adcafaf93c8f98`

RUN `mvn clean install`

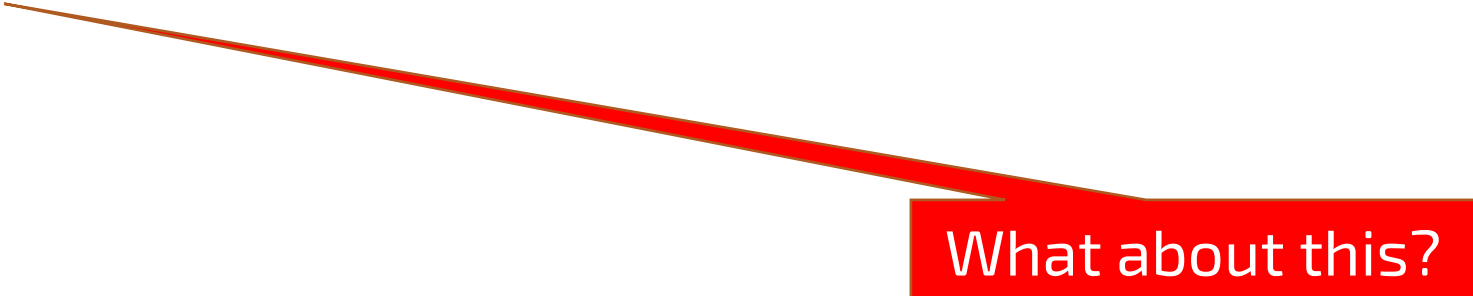


What about this?

CMD `"java -jar Main.class"`

THAT'S WHY.

FROM ubuntu:4033353383af19ec179c01dda7f355a246c6adcafaf93c8f98


RUN `download_random_sh*t_from_the_internet.sh`

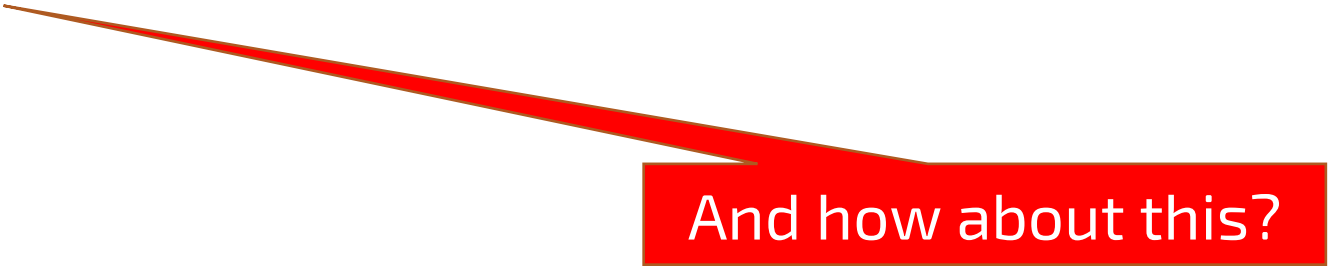

And how about this?

CMD `["/usr/bin/node", "/var/www/app.js"]`

THAT'S WHY YOU DON'T TRUST DOCKER

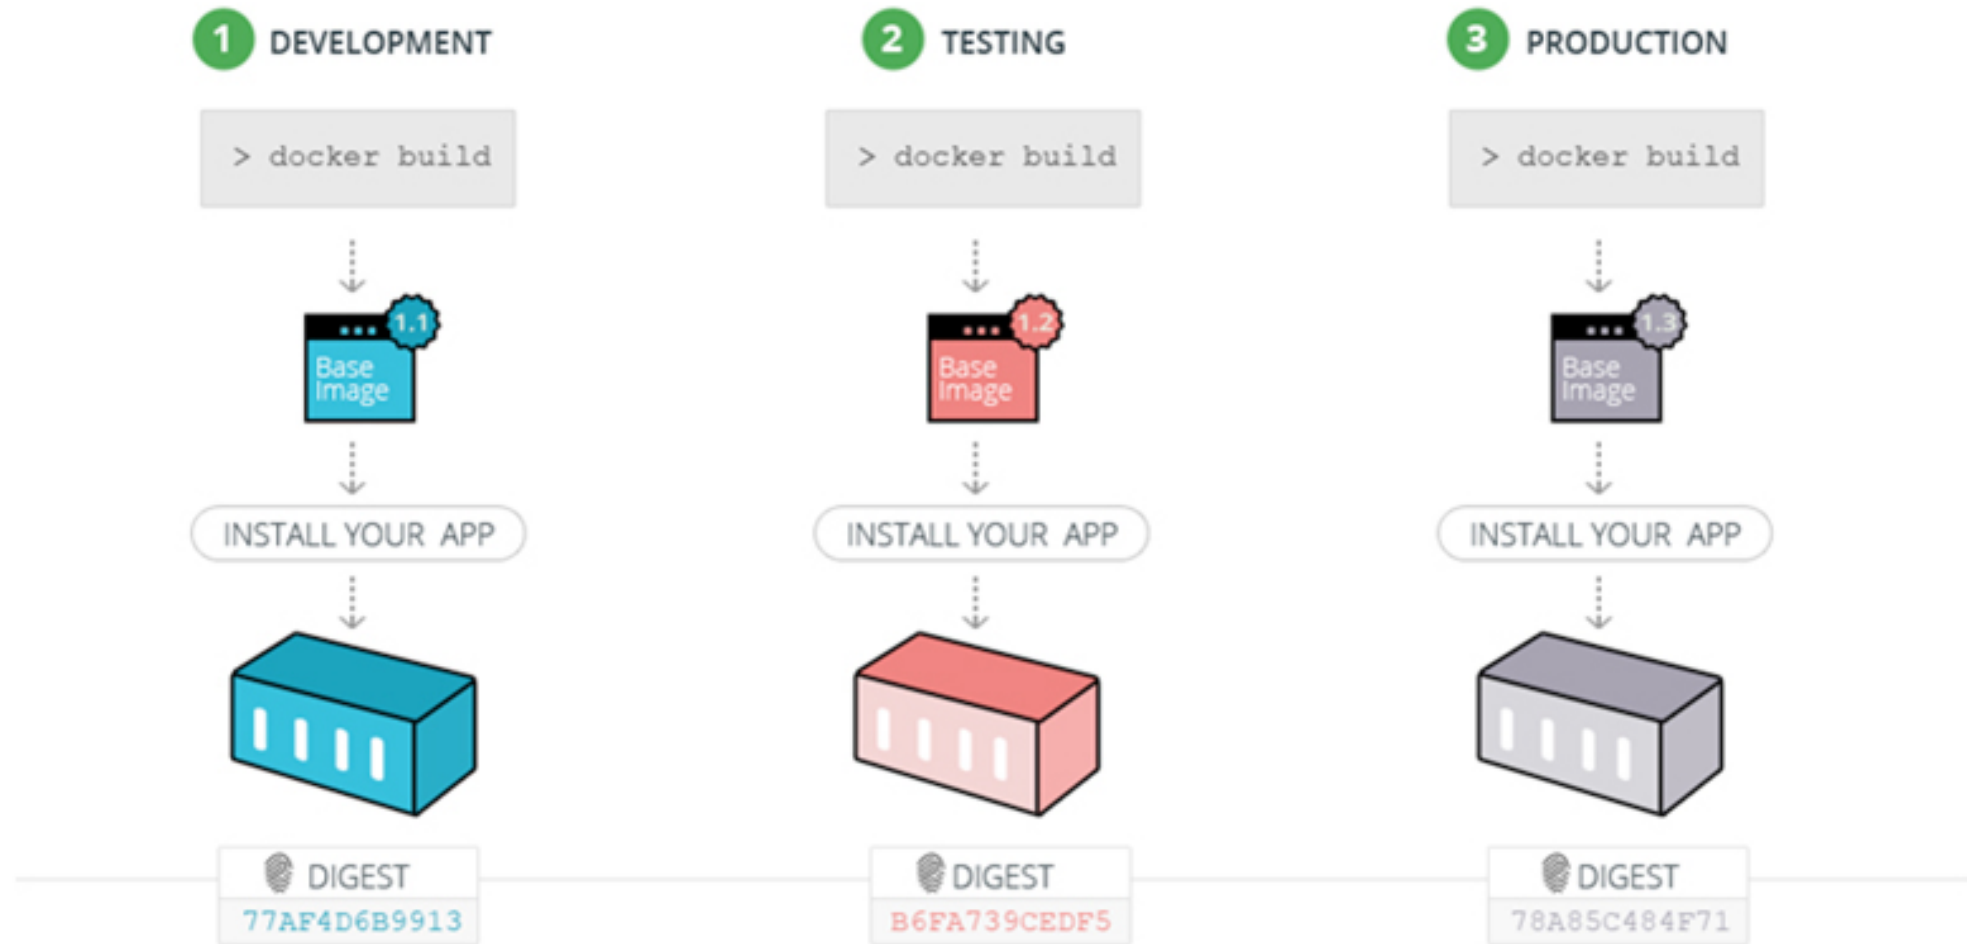

I DON'T ALWAYS BUILD PROMOTION PIPELINES



**BUT WHEN I DO, IT'S WITH
IMMUTABLE AND STABLE BINARIES**

1 DEVELOPMENT

```
> docker build
```



INSTALL YOUR APP




DIGEST

77AF4D6B9913

2 TESTING

```
> build once
```


```
> automatically promote the same image  
through the pipeline to production
```



DIGEST

77AF4D6B9913

3 PRODUCTION



DIGEST

77AF4D6B9913

PROMOTE

PROMOTE

WHAT'S UP WITH THE GATES?!

- QA SHOULDN'T TEST DEV IMAGES
- NON-TESTED IMAGES SHOULDN'T BE STAGED
- NON-STAGED, NON-TESTED OR DEV IMAGES SHOULDN'T END UP IN PRODUCTION!!!

LET'S BUILD ROCK-SOLID PIPELINE!





HOW DO I SEPARATE DEV FROM PROD?!

@jbaruch

#DeveloperWeek

<http://jfrog.com/shownotes>


OPTION 1: METADATA TAGS

LABEL

```
LABEL <key>=<value> <key>=<value> <key>=<value> ...
```

The `LABEL` instruction adds metadata to an image. A `LABEL` is a key-value pair. To include spaces within a `LABEL` value, use quotes and backslashes as you would in command-line parsing. A few usage examples:

```
LABEL "com.example.vendor"="ACME Incorporated"  
LABEL com.example.label-with-value="foo"  
LABEL version="1.0"  
LABEL description="This text illustrates \  
that label-values can span multiple lines."
```

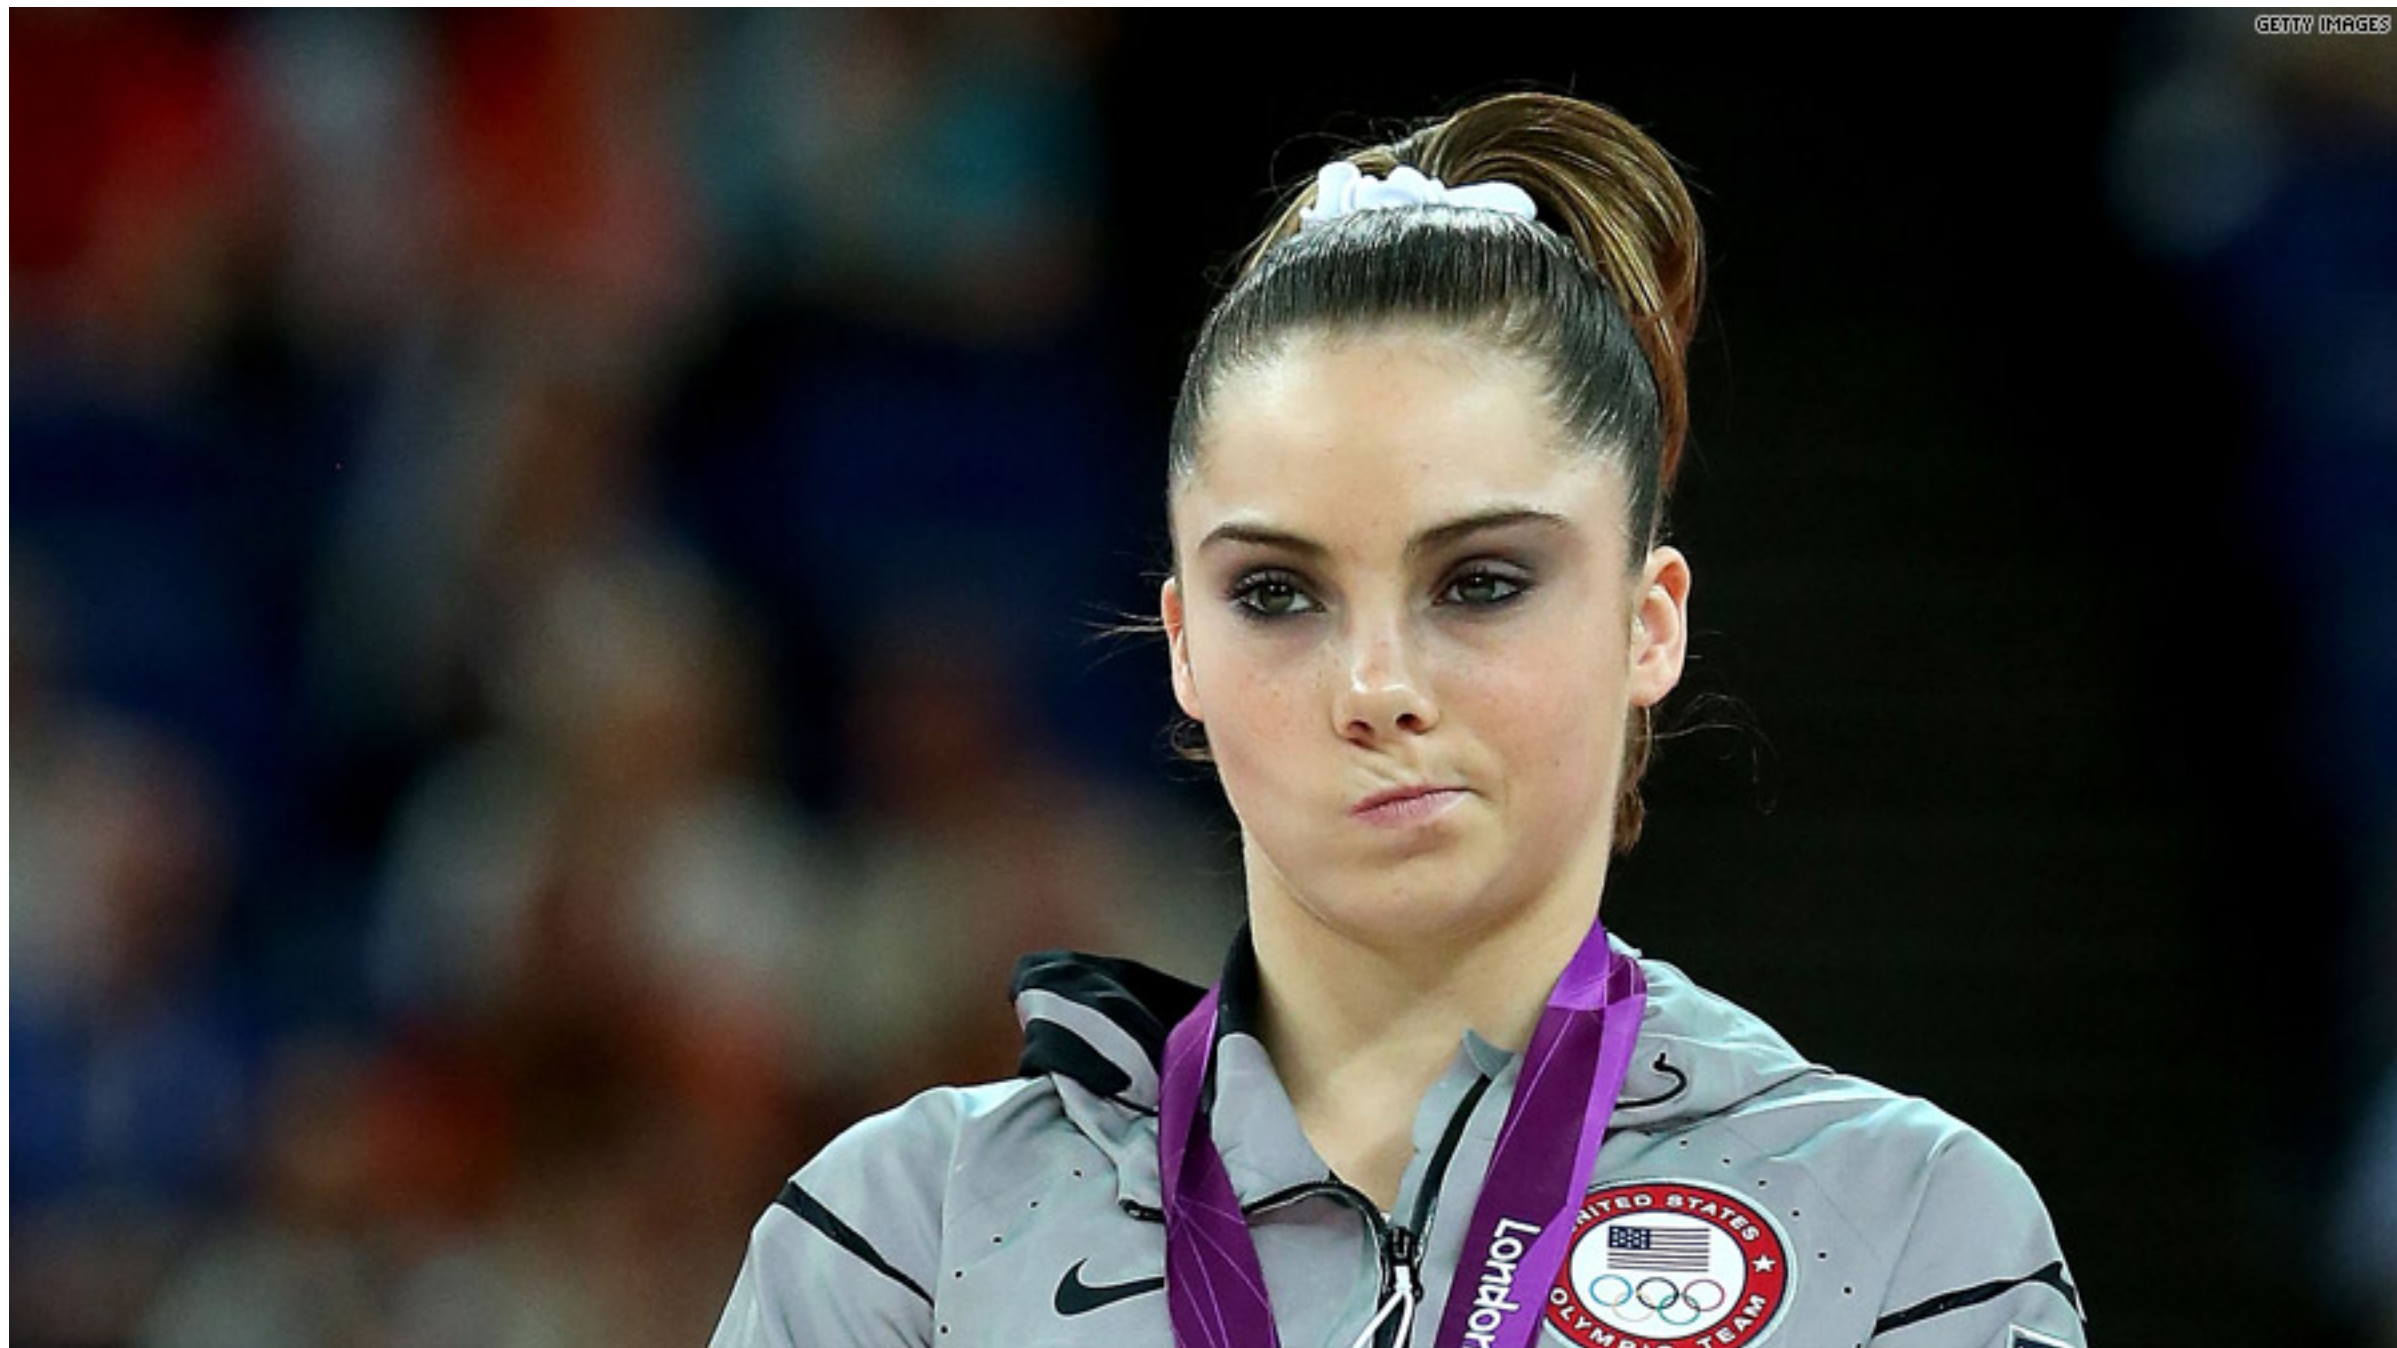

OPTION 2: DOCKER REPOSITORIES

Repositories


Estimated reading time: 5 minutes


Docker Hub repositories allow you share container images with your team, customers, or the Docker community at large.

Docker images are pushed to Docker Hub through the `docker push` command. A single Docker Hub repository can hold many Docker images (stored as **tags**).


Creating repositories

To create a repository, sign into Docker Hub, click on **Repositories** then **Create Repository**:

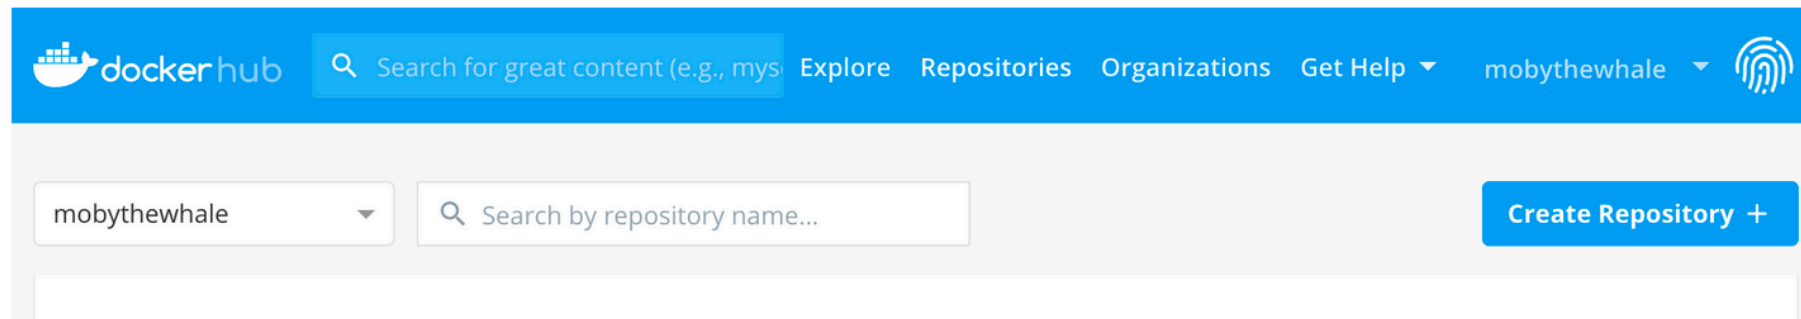

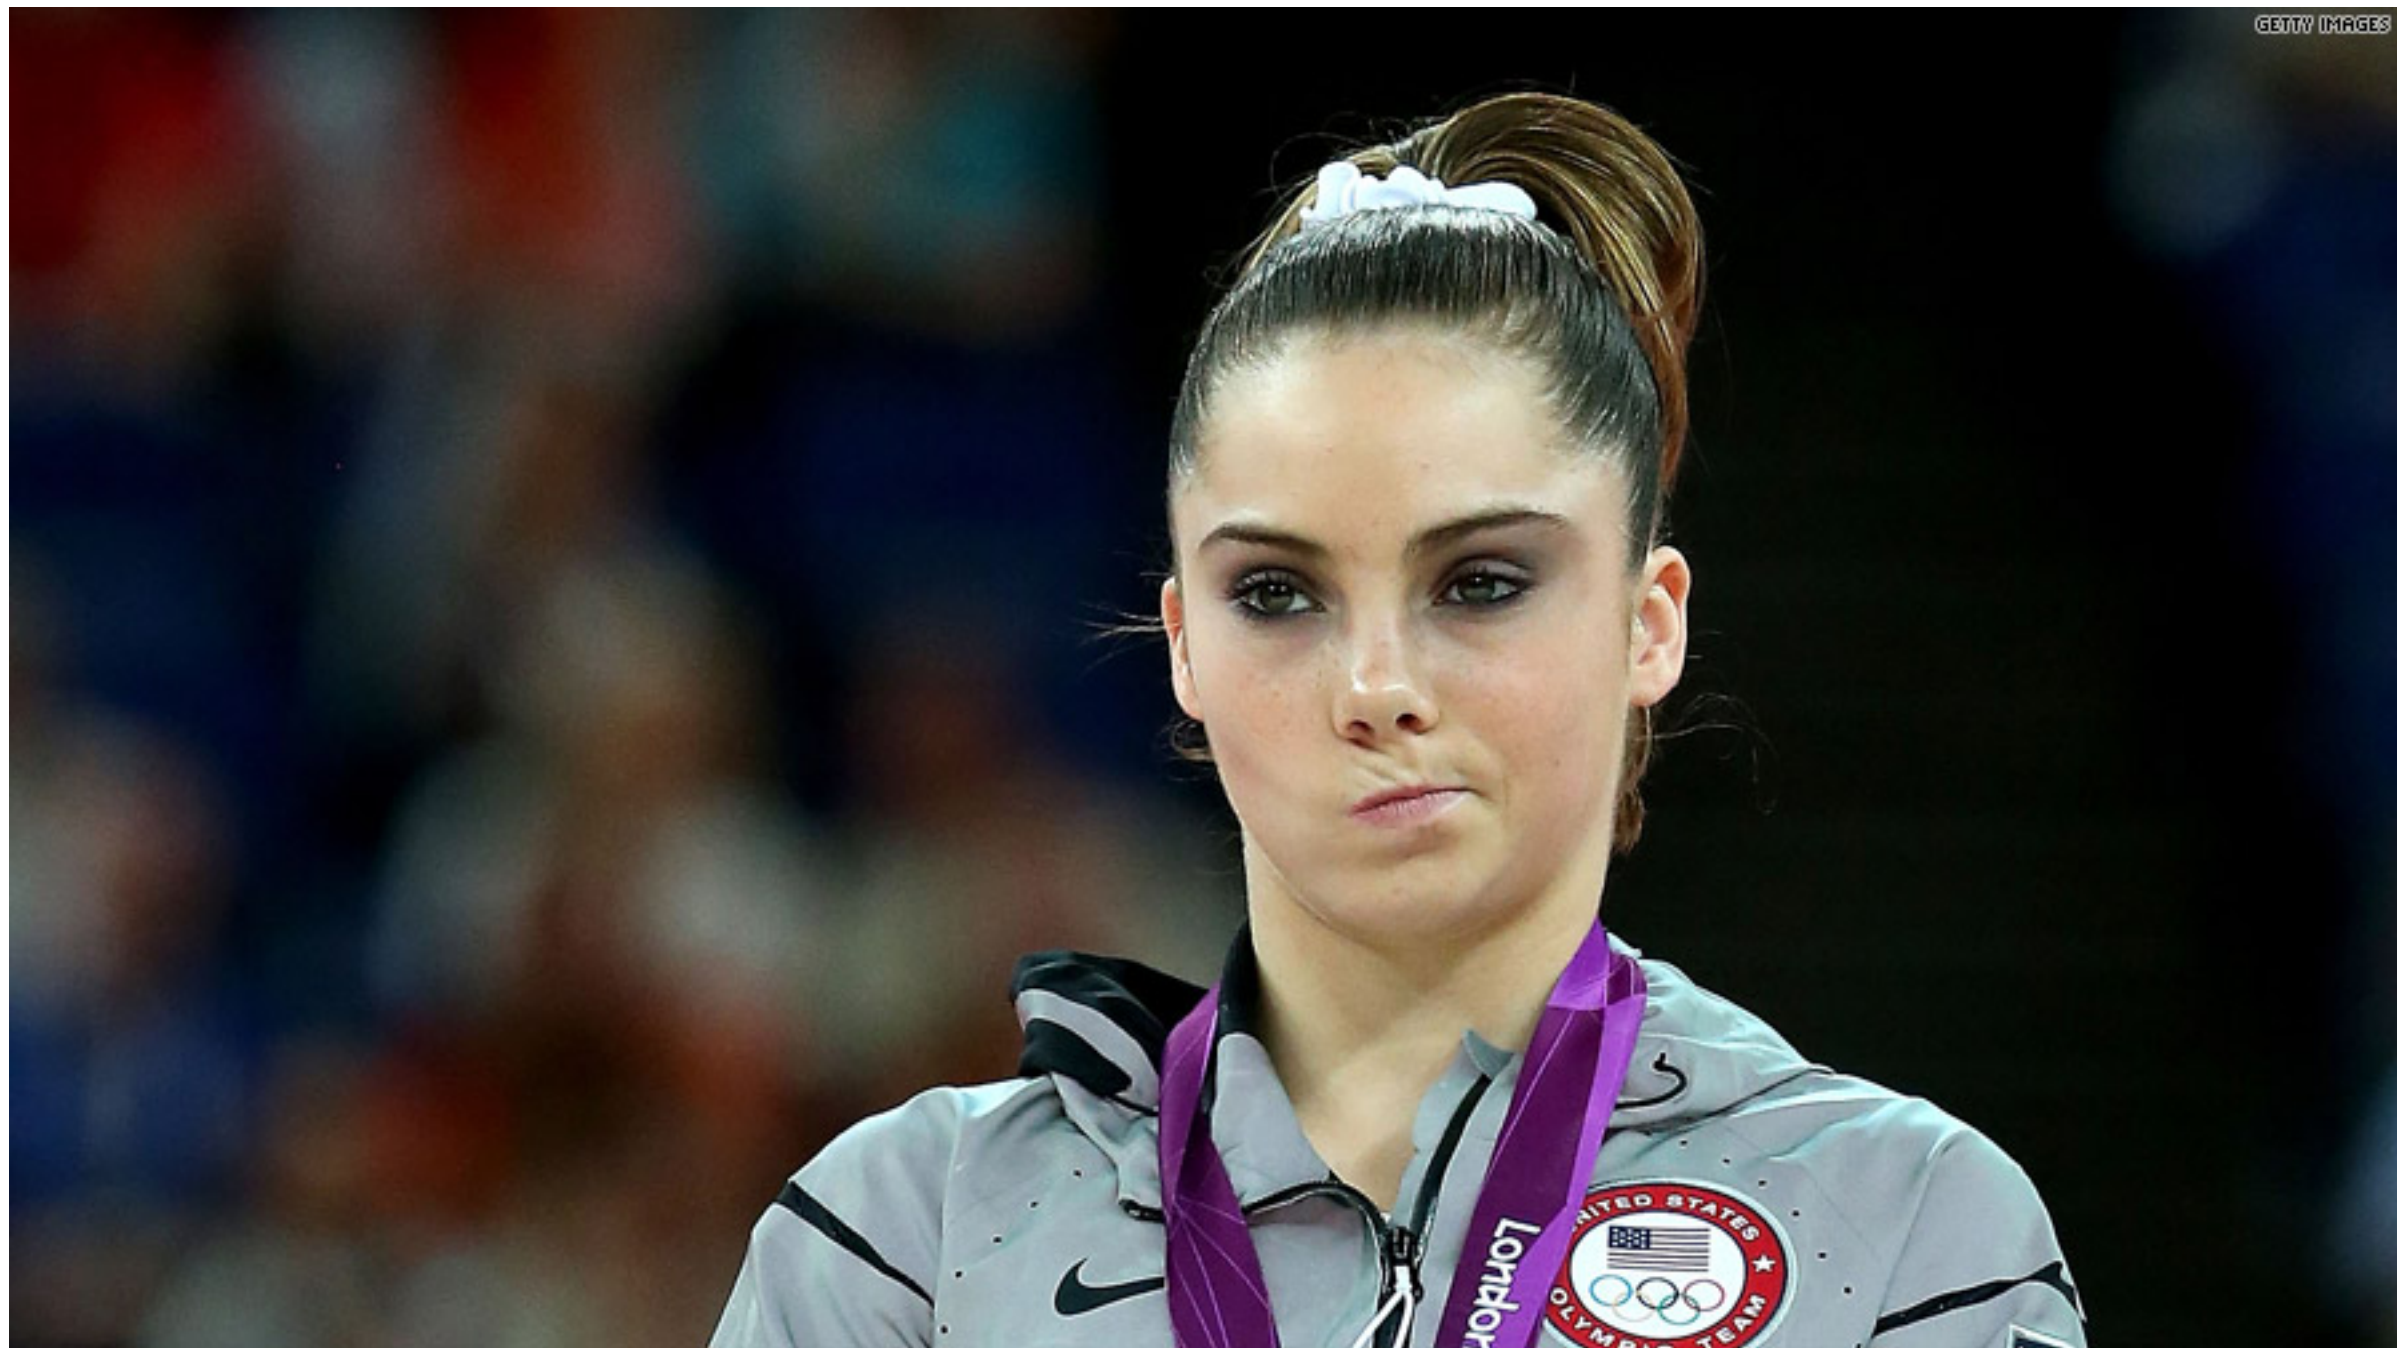

SEPARATE REGISTRIES PER ENVIRONMENT

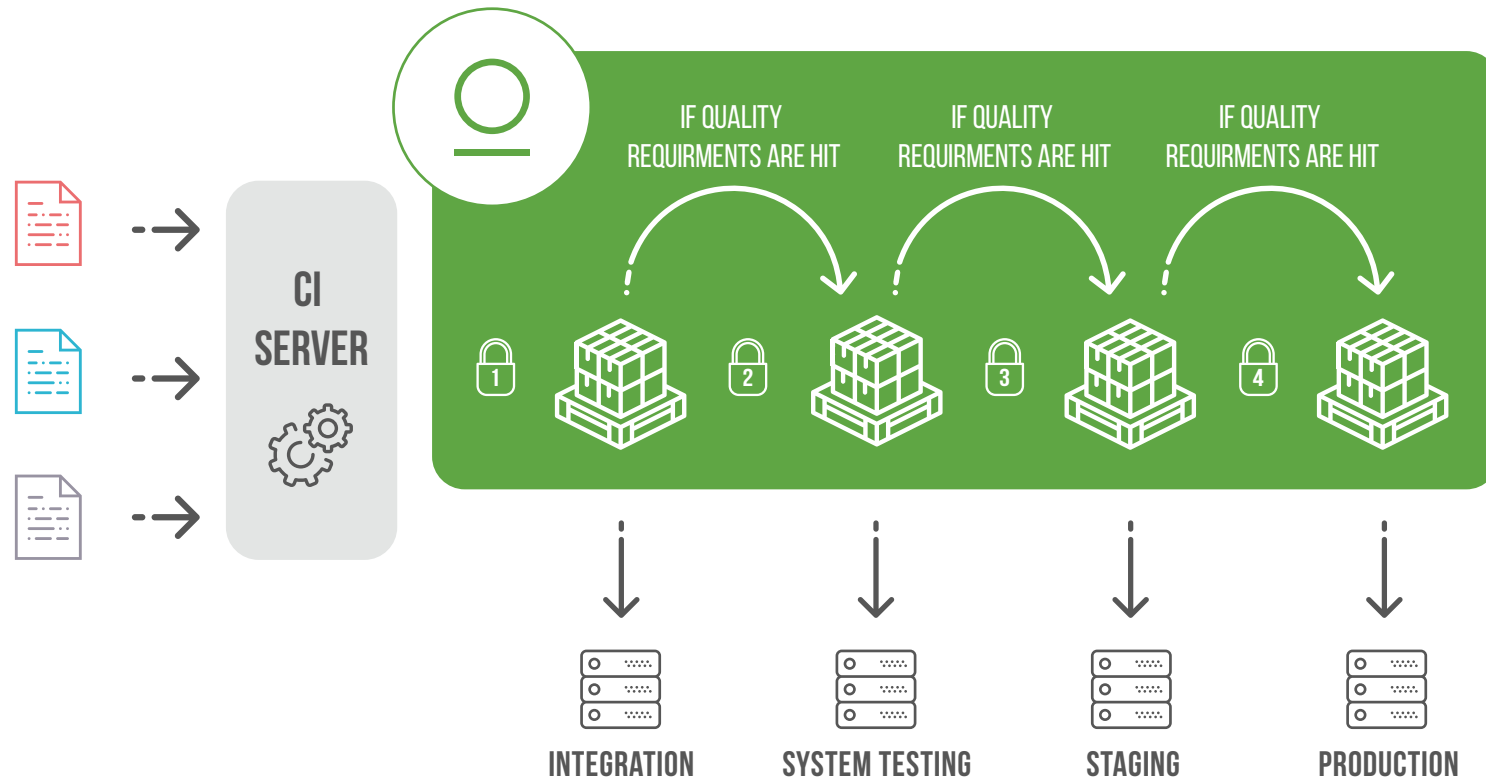



TRUMPED-UP LIMITATIONS



“640K OUGHT TO BE ENOUGH FOR ANYBODY.”

BILL GATES

© Lifehack Quotes

@jbaruch

#DeveloperWeek

<http://jfrog.com/shownotes>

THE ANATOMY OF DOCKER TAG

Tag an image for a private repository

To push an image to a private registry and not the central Docker registry you must tag it with the registry hostname and port (if needed).

```
$ docker tag 0e5574283393 myregistryhost:5000/fedora/httpd:version1.0
```

Wait a second, how can I
have more than one
registry per host now?!



HOW CAN WE SUPPORT THIS?

`https://host:8081/registry/docker-dev/busybox`

`https://host:8081/registry/docker-qa/busybox`

`https://host:8081/registry/docker-staging/busybox`

`https://host:8081/registry/docker-prod/busybox`

**“ONE REGISTRY PER HOST OUGHT TO BE
ENOUGH FOR ANYBODY.”**



PANIC!



@jbaruch

#DeveloperWeek

<http://jfrog.com/shownotes>


VIRTUAL HOSTS/PORTS TO THE RESCUE

```
docker tag host:port/busybox
```

Registry host

Tag name

VIRTUAL HOSTS/PORTS TO THE RESCUE

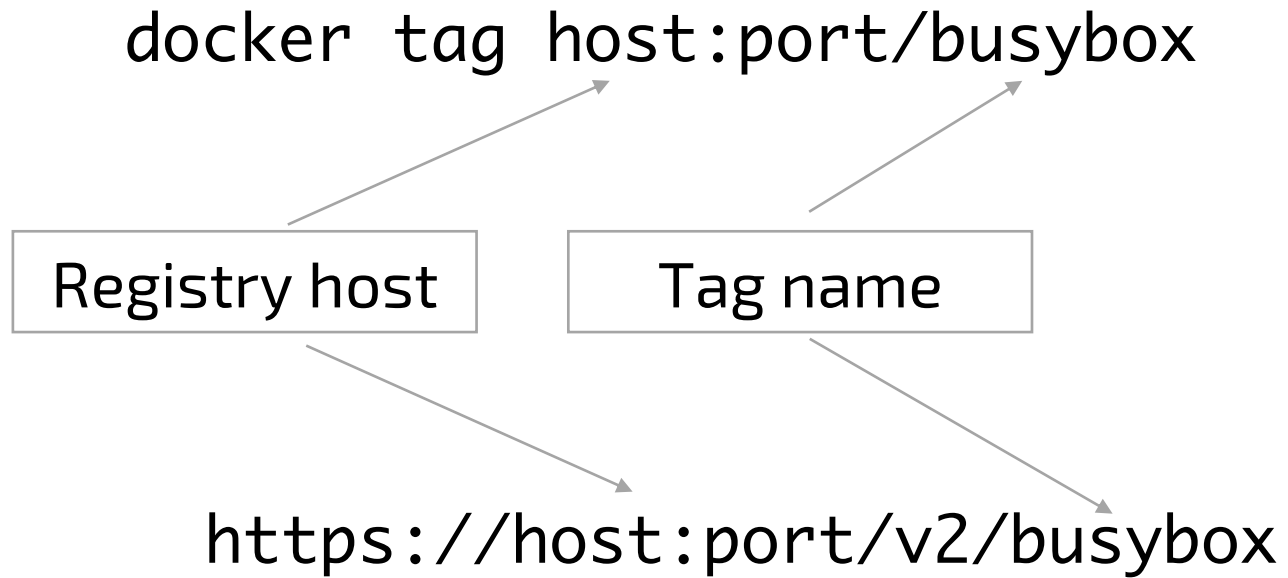

VIRTUAL HOSTS/PORTS TO THE RESCUE

`docker tag host:port/busybox`

Registry host

Tag name


`https://host:port/v2/busybox`

`https://host:8081/registry/docker-dev/busybox`


Context name

Registry name

Tag name

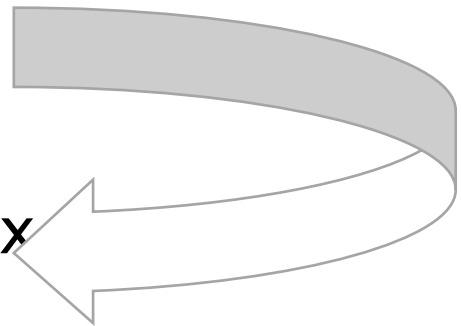

```
server {  
    listen 5001;  
  
    server_name 192.168.99.100;  
    if ($http_x_forwarded_proto = '') {  
        set $http_x_forwarded_proto $scheme;  
    }  
    rewrite ^/(v1|v2)/(.*) /artifactory/api/docker/docker-dev/$1/$2;  
    ...  
}
```

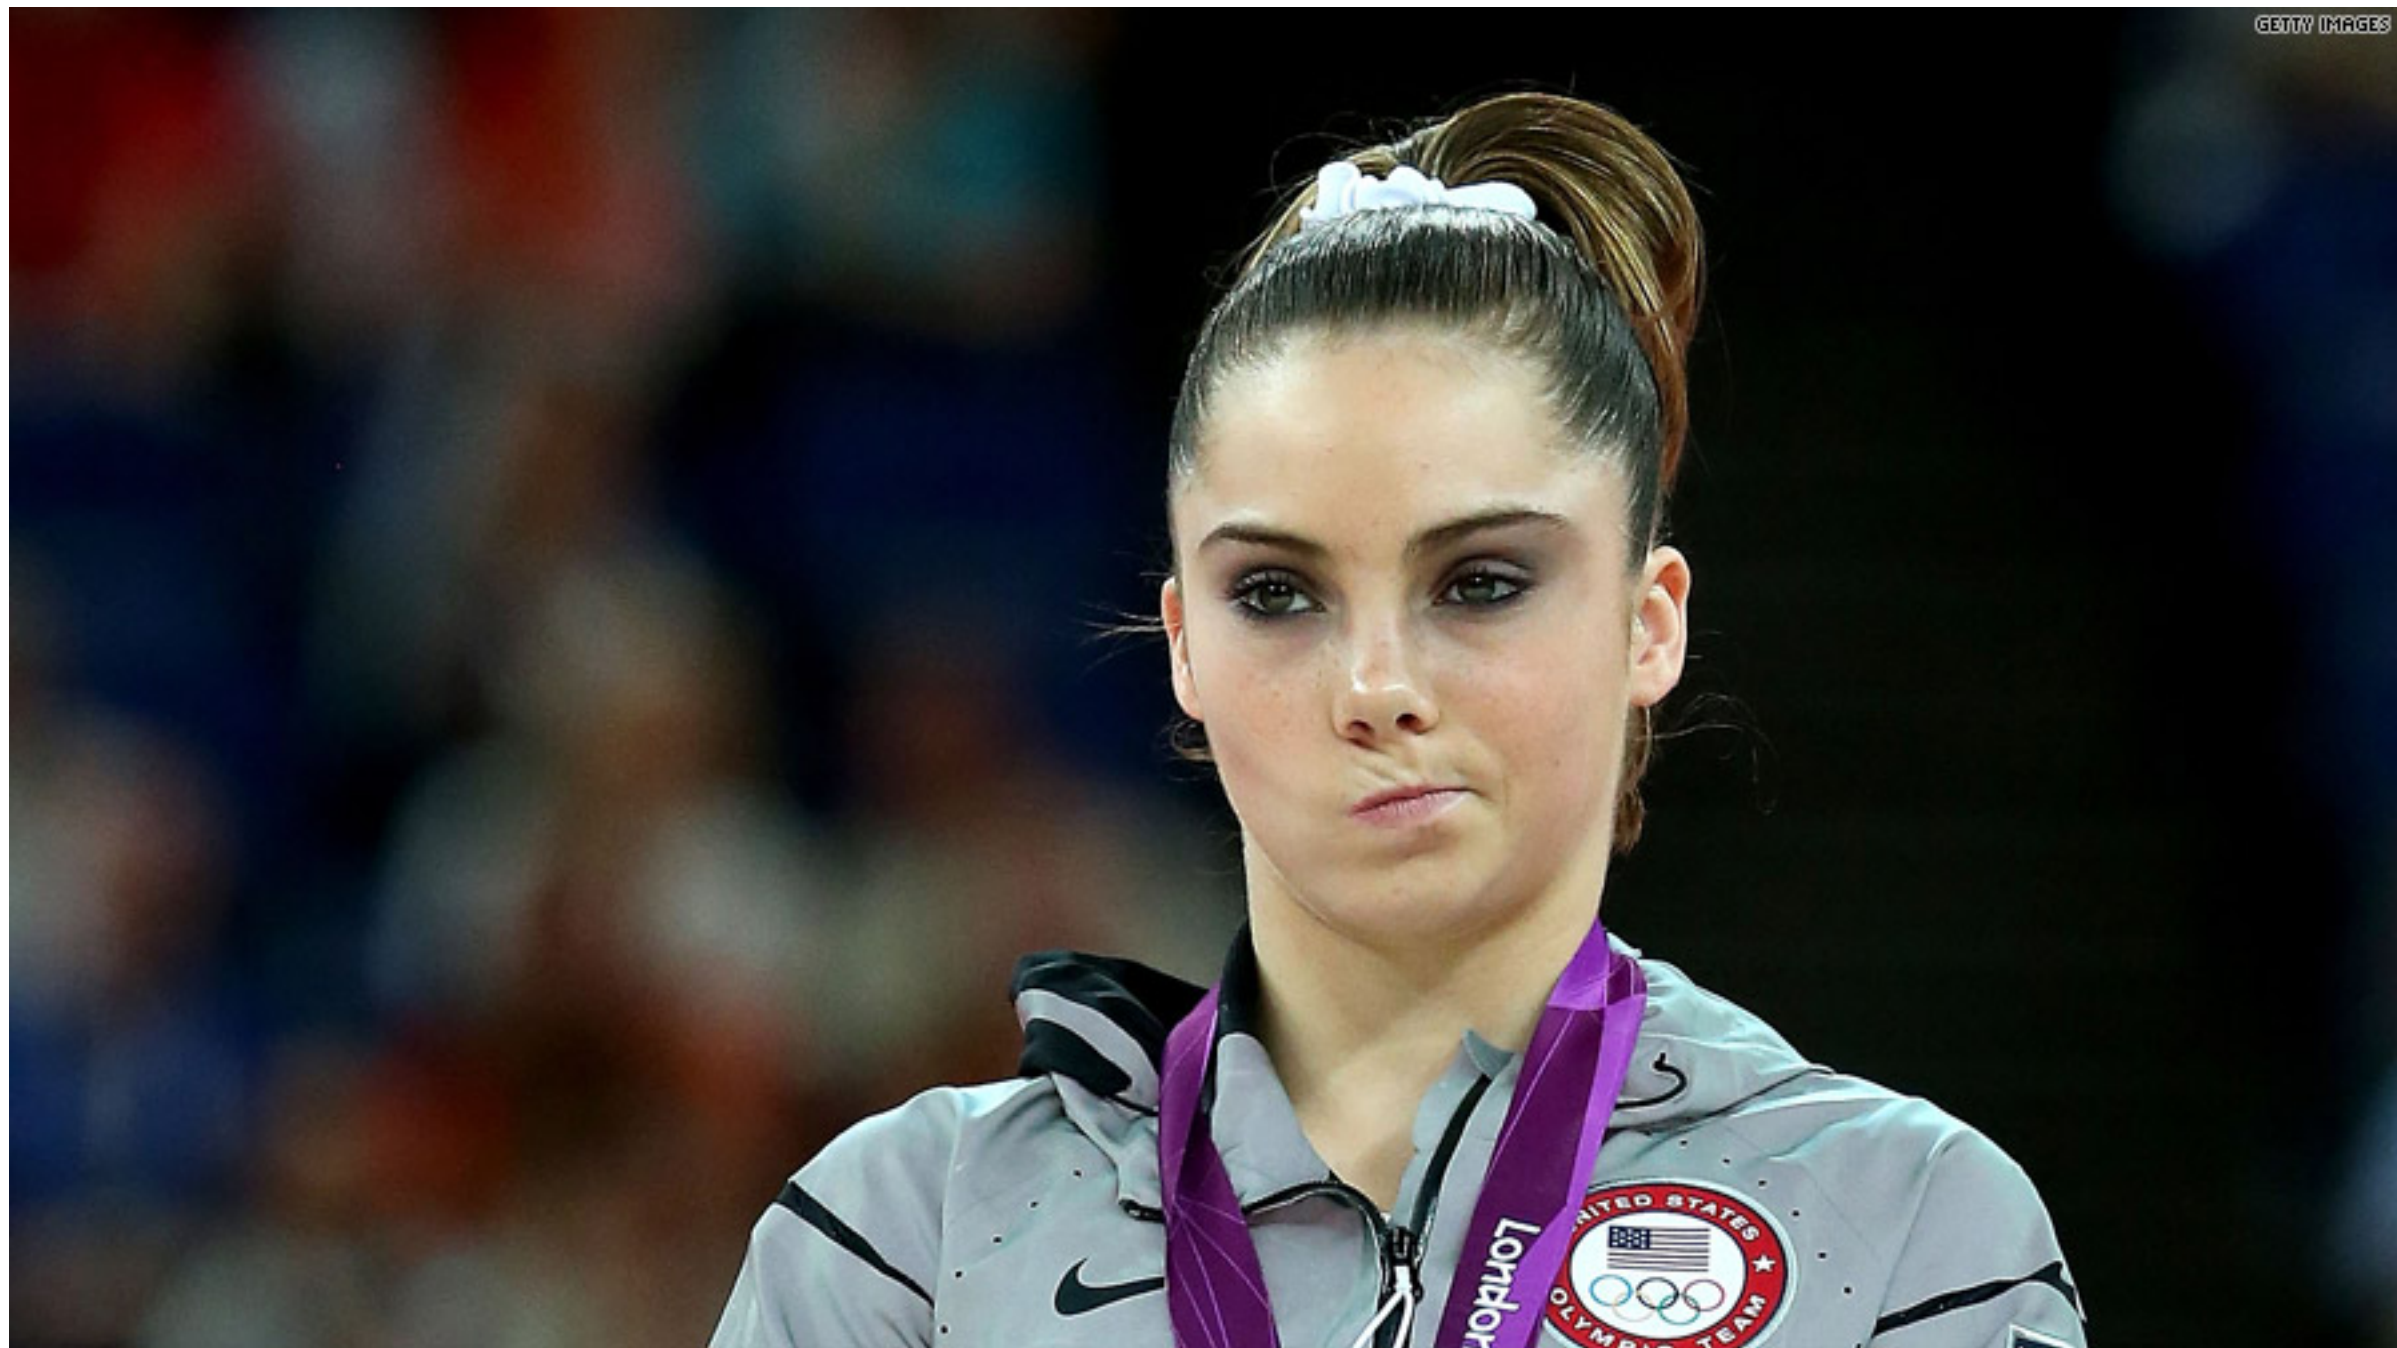

LET'S ABUSE THINGS!

Tag an image for a private repository

To push an image to a private registry and not the central Docker registry you must tag it with the registry hostname and port (if needed).

no-one uses this anyway



```
$ docker tag 0e5574283393 myregistryhost:5000/fedora/httpd:version1.0
```

LET'S ABUSE THINGS!

Tag an image for a private repository


To push an image to a private registry and not the central Docker registry you must tag it with the registry hostname and port (if needed).

```
$ docker tag 0e5574283393 myregistryhost:5000/staging/httpd:version1.0
```

BUT THEN YOU REALIZE...

Wait a second, now I need to pull, retag and push for every step?!




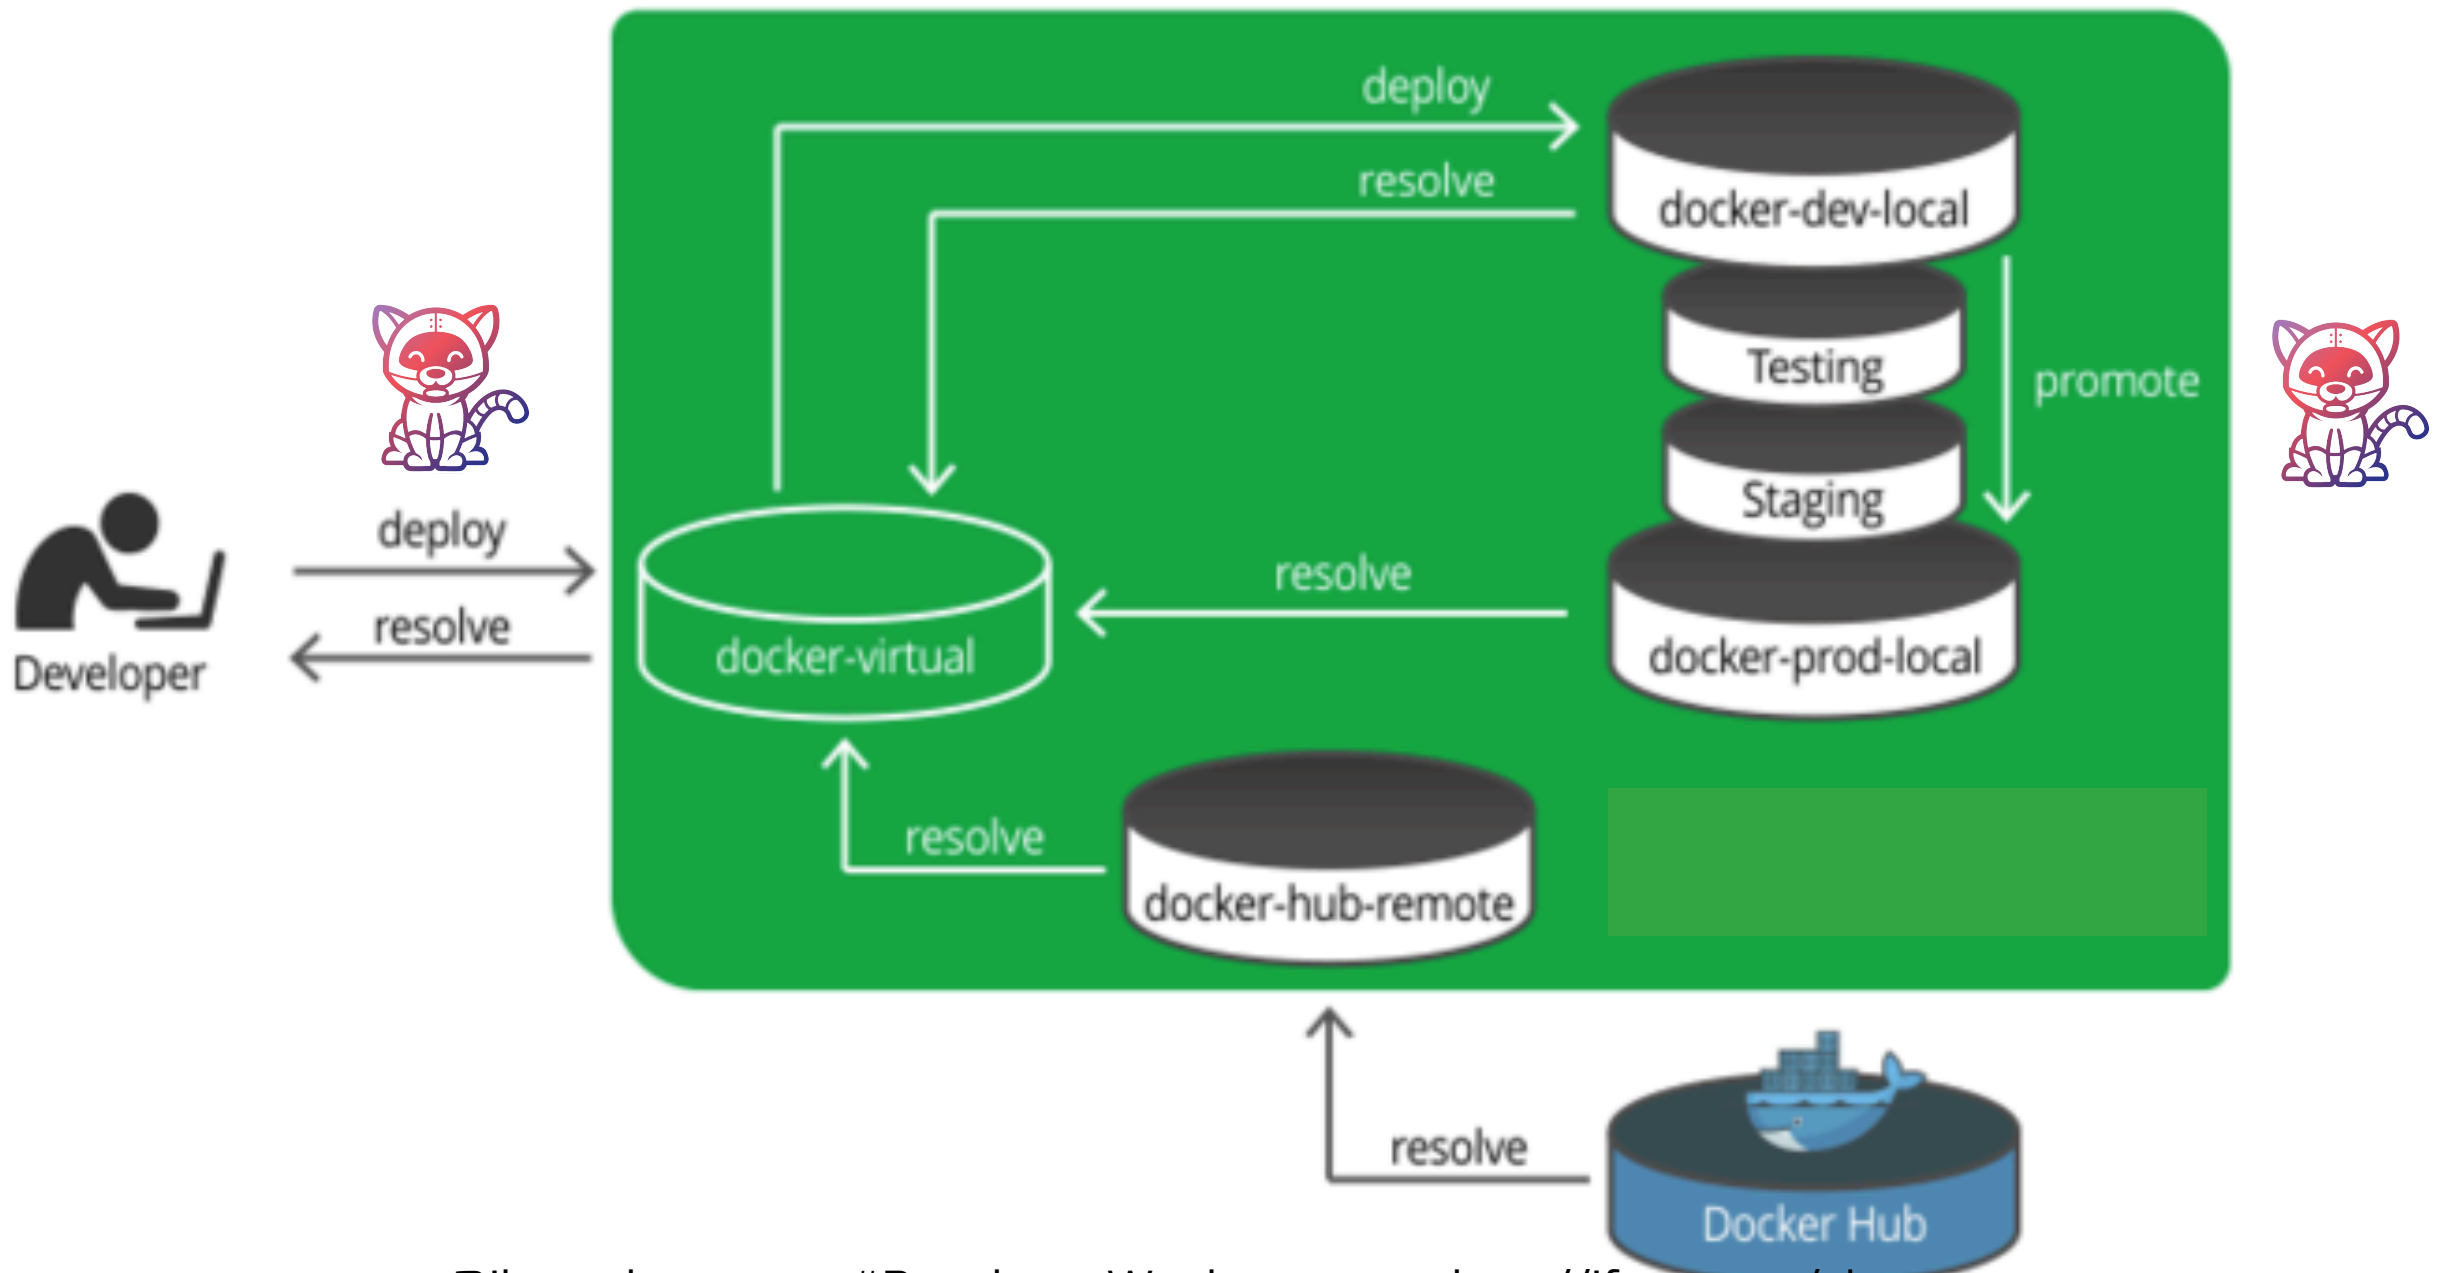

@jbaruch

#DeveloperWeek

<http://jfrog.com/shownotes>

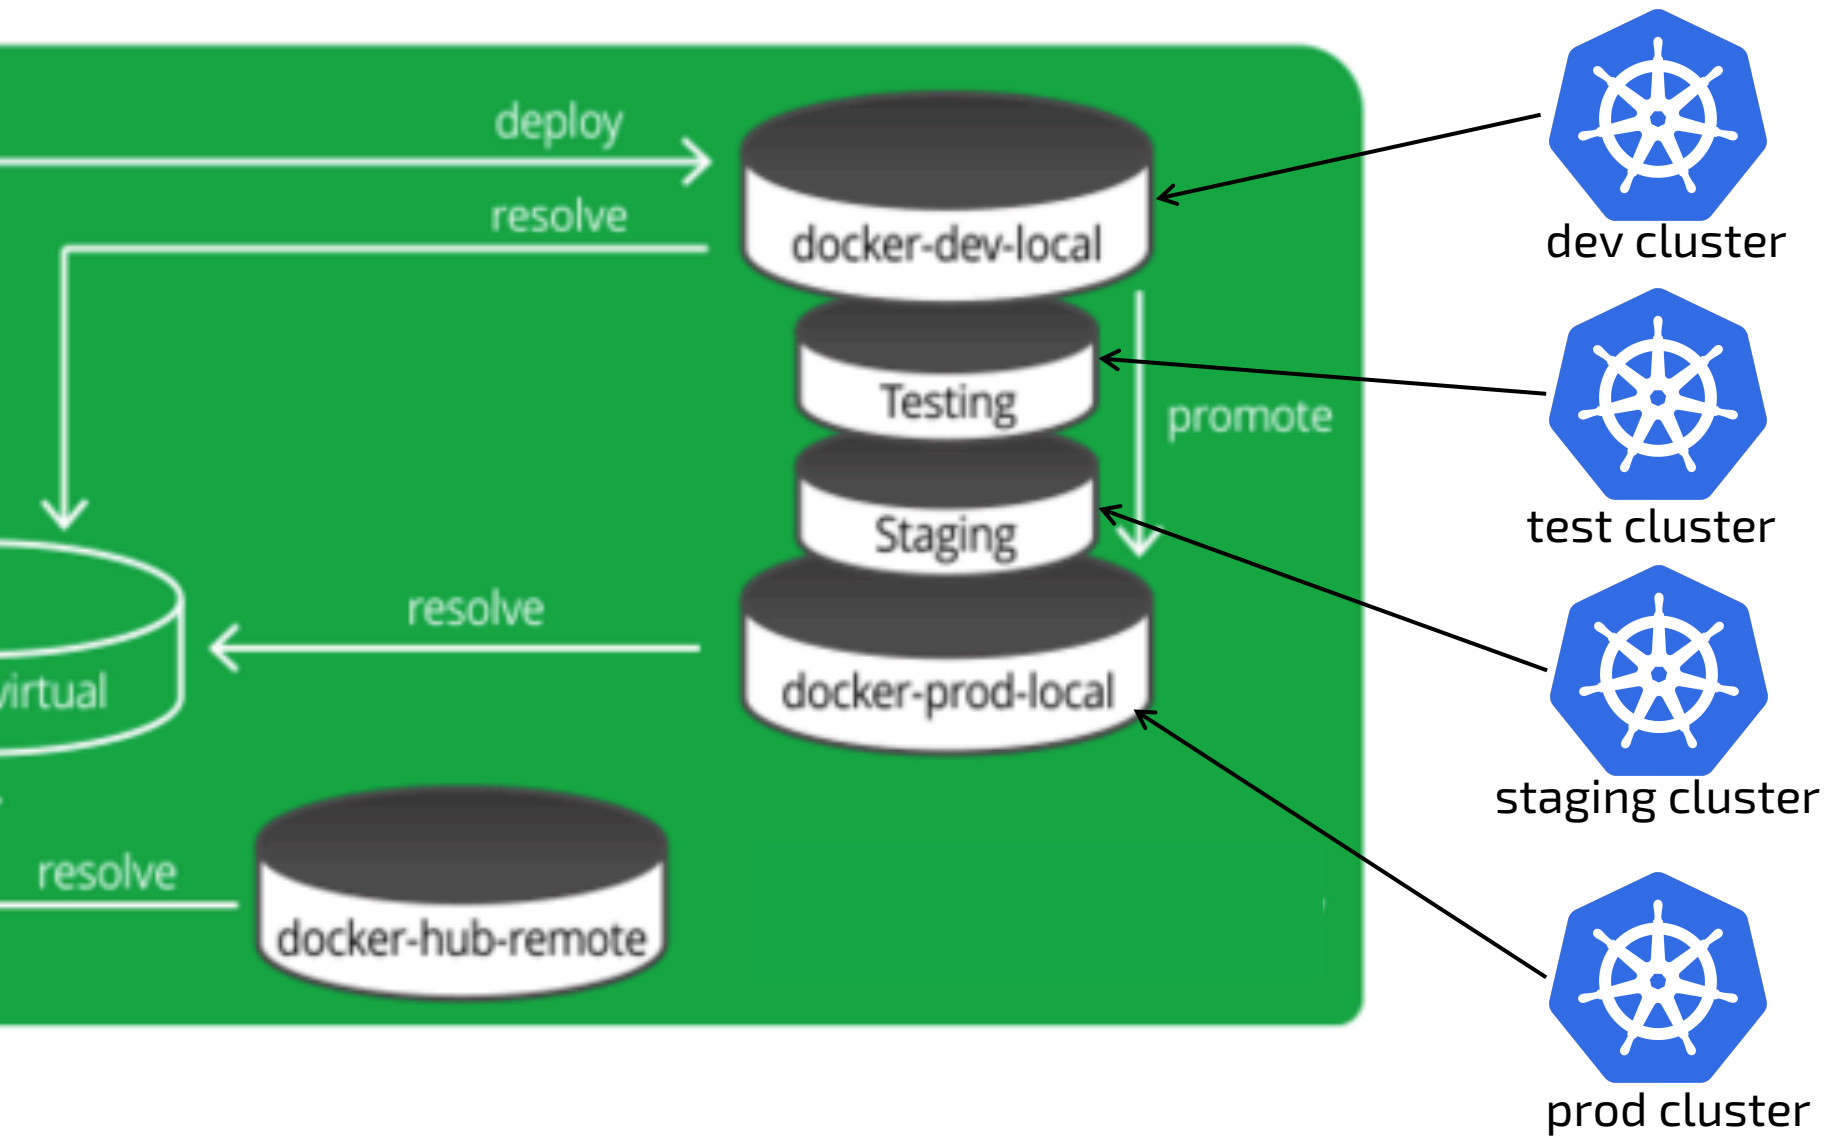



REPOSITORY (DOCKER): Top level directory in a registry

REPOSITORY (THE REST OF THE WORLD): A registry

WIN-WIN-WIN

- SINGLE POINT OF ACCESS TO MULTIPLE REGISTRIES WHEN NEEDED
- COMPLETELY ISOLATED ENVIRONMENTS
- IMMEDIATE AND FREE PROMOTIONS



BUT I LOVE MY LATEST!

JFrog Container Registry

Artifacts

Search Artifacts

?

Welcome, admin

Application

Dashboard

JFrog Container Registry

Packages

Builds

Artifacts

Distribution

Pipelines

Security & Compliance

JFrog Container Registry
license 7.3.2 rev 70302900
undefined
© Copyright 2020 JFrog Ltd

Artifact Repository Browser

TreeSimple

docker

helmhub

artifactory-build-info

docker-dev-local

docker-local

docker-prod-local

jfrog-docker-app

11

14

15

16

17

18

19

20

21

23

25

26

latest

manifest.json

sha256_0ce121b6a2ffae7f0fc0b7c20d3a0a461

sha256_2fbb74461eb3d3e7d2e0c730359e88c

sha256_5c0d6befd531e53b8f0d96dce9e3418

Trash Can

manifest.json

DownloadViewActions

GeneralEffective PermissionsPropertiesFollowersBuilds

Add:Property | Property Set

Name *

Value

Add

☐ Recursive?

9 Properties

Filter by Property

Delete

Property	Value(s)
build.name	demo_kubecon
build.number	26
build.timestamp	1575339511425
docker.manifest	latest
docker.manifest.digest	sha256:d002e5eafe3c4e2e1d69830342f7cf1d2150e3735bd17...
docker.manifest.type	application/vnd.docker.distribution.manifest.v2+json
docker.refersTo	26
docker.repoName	jfrog-docker-app

@jbaruch

#DeveloperWeek

<http://jfrog.com/shownotes>

WIN-WIN

- SIMPLICITY OF LATEST
- ALWAYS KNOW WHAT IT REALLY MEANS
- AS LONG AS YOU PROMOTED IMMUTABLE ARTIFACT



But what about the rest
of the dependencies?

JFrog Container Registry

Application

Dashboard

JFrog Container Registry

Packages

Builds

Artifacts

Distribution

Pipelines

Security & Compliance

 JFrog Container Registry
license 7.3.2 rev 70302900
undefined
© Copyright 2020 JFrog Ltd

Packages

Search Packages

?

Welcome, admin

Packages > library/ubuntu

 library/ubuntu

Latest version: sha256__2fefff9eeca4e736f9f8e57813a97fe930554f474f7795ffa5a9261adeaaf44 07-11-19 08:50:20 -0800

Scanned Xray

2 Versions

5 Downloads

Versions

View By:

List

Graph

Filter

Version	Repositories	Digest	Modified	Downloads	Xray Status
sha256__134c7fe821b9d3594...	1 docker-remote-cache	134c7fe821b9d359490...	07-11-19 07:38:29 -0800	2	Requires an Xray license
sha256__2fefff9eeca4e736f9f...	1 docker-remote-cache	2fefff9eeca4e736f9f8e...	07-11-19 08:50:20 -0800	3	Requires an Xray license

@jbaruch

#DeveloperWeek

http://jfrog.com/shownotes



Application



Dashboard ▶



JFrog Container Registry ▼



Packages



Builds



Artifacts



Distribution



Pipelines



Security & Compliance

Artifact Repository Browser

Tree Simple



- > docker
- > helmhub
- > artifactory-build-info
- > docker-dev-local
- > docker-local
- > docker-prod-local
- ▼ generic-local
 - ▼ java
 - > jdk-8u91-linux-x64.tar.gz
 - ▼ org/jfrog/example/gradle/webservice/1.1.2
 - > webservice-1.1.2.war
 - ▼ tomcat
 - > apache-tomcat-8.tar.gz
- > helm-local
- > helm-prod-local

OWN YOUR DEPENDENCIES

- YOUR BASE IMAGE
- YOUR INFRA
- YOUR APPLICATION FILES

CONCLUSIONS

- BUILD ONLY ONCE
- SEPARATE ENVIRONMENTS
- PROMOTE WHAT YOU'VE BUILT
- OWN YOUR DEPENDENCIES

Q&A AND LINKS

- @jbaruch
- #DeveloperWeek
- <http://jfrog.com/shownotes>