

El error en dar un error por hecho

Gabrielle von Koss • @gvonkoss

**When you assume,
you make an error
out of you and me**

**When you assume,
you make an ass
out of u and me**

**cuando asumes que haces
un trasero de ti y de mí**

* — Advertencia de visual intermitente

**El error en dar un
error por hecho**



YIELDS

WOBLEY WATSON
INCORPORATED
PUBLIC ACCOUNTANTS

THE UNITED STATES OF AMERICA
DEPARTMENT OF AGRICULTURE
BUREAU OF AGRICULTURAL ECONOMICS
WASHINGTON, D. C.



THE FINANCIAL TIMES

INDUSTRY COMMERCE PUBLIC AFFAIRS

NEWS SUMMARY

STEEL PRODUCTION



Search components

Filter components by name or tag

Types

Filter components by type



Modules



Imagesets



Services

Status

Filter components by status



Active



Maintained



Experimental



Deprecated



Dead

Primitives

o-colors

v4.4.1

active

FT brand colours: Sass variables and helpers to use and define them

o-fonts

v3.0.4

active

Webfont loader for the FT's fonts.

o-grid

v4.3.8

active

Grid for responsive layouts

o-loading

v2.2.1

active

A visual loading indicator

o-typography

v5.6.5

active

FT brand typographic styles

o-visual-effects

v2.0.3

active

Sass mixins to use CSS visual effects

<https://registry.origami.ft.com/components>

LIBRARY UPDATES

The registry is updated whenever a new tag is pushed to a repository that has an `origami.json` file in it. If your repository meets the following criteria then it should be ingested within 5 minutes:

- It lives in the [Financial-Times GitHub organisation](#)
- It contains a valid `origami.json` file (see [the spec](#) for more information)
- It has at least one git tag which complies with [semantic versioning](#)

BOWER REGISTRY

The Origami components library provides a read-only API conforming to the Bower Registry API spec (excluding registration and publishing). To specify the Origami components library as your source for Bower components, create a `.bowerrc` file in your home directory or the root of your project's working tree, with the following content:

experimental

Filter components

Primitives

- o-colors
- o-fonts
- o-grid
- o-loading
- o-typography
- o-visual-effects

Components

- o-ads
- o-aside-panel
- o-banner
- o-buttons
- o-comments

o-buttons

Buttons module

[Readme](#) [SassDoc](#)

active

VERSION:


5.11.6 ▾

Primary button

Primary button.

DEMO HTML

OPEN DEMO IN A NEW TAB



Secondary/default button

The secondary button is the default and usually most used button.

DEMO HTML

OPEN DEMO IN A NEW TAB

GITHUB REPOSITORY

QUICKSTART

BUILD SERVICE

Add the following to your `<link>` tag

```
o-buttons@^5.11.6
```

[How do I do that?](#)

For more information see the [Origami build service](#).

MANUAL BUILD PROCESS

Run the following command in the root directory of your project, to add this dependency to your `bower.json` file:

```
bower install --save "o-butto:
```

For more information see the [Origami](#)

<https://registry.origami.ft.com/components/o-buttons>



**Por pedazo de pastel,
favor dejar comentarios**

— Me gustan las guías de corte de frambuesa

— Es gratis

— Me gustan todas las cosas encima

— Se ve verdaderamente achocolatado

— Tiene rodajas muy limpias

— **Otras personas no saben lo que sabemos,
y nosotros no sabemos lo que otras personas saben.**



mensajes de error

?

mensajes de error

?



1 hemos visto el error antes





2 **el error nos hace sentir mal**



NO TENGO NI IDEA DE LO QUE ESTOY HACIENDO



daiyi! ✨ (chris)

@daiyitastic

“As tool builders, we’re gatekeepers. Every time we print an incomprehensible error msg, someone decides they’re not good enough at coding”

“Como desarrolladores, somos guardabarreras. Cada vez que imprimimos un mensaje de error incomprensible, alguna persona decide que no es adecuada para la programación.”


- 1 hemos visto el error antes
- 2 **el error nos hace sentir mal**

Error de tipo: `indefinido` no es una función

Error no capturado [Objeto?objeto]



Ficha inesperada, esperaba,

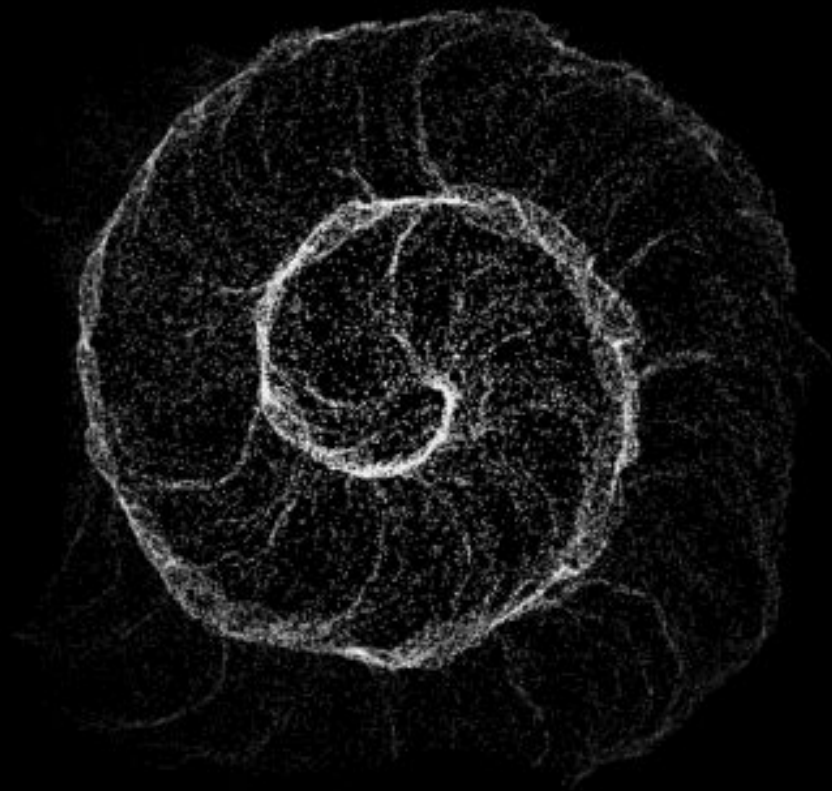



— **contexto**

— **elaboración**

— **claridad**



README
LEEME

n-heroku-tools

ADVERTENCIA: n-heroku-tools **nunca** debe ser instalado globalmente. Siempre instale como una 'devDependency' de su aplicación.

Para parches a NBT 5 favor hacer PRs a la rama 'nbt-cinco' y liberar de allí.

Uso: n-heroku-tools [opciones] [comando]

Comandos:

deploy [options] [app]	runs haikro deployment scripts with sensible default
configure [options] [source] [target]	gets environment variables from Vault and uploads t
scale [options] [source] [target]	downloads process information from next-service-req
provision [options] [app]	provisions a new instance of an application server
review-app [options] [app]	create a heroku review app and print out the app na
destroy [options] [app]	deletes the app from heroku
deploy-hashed-assets [options]	deploys hashed asset files to S3 (if AWS keys set c
deploy-static [options] <source> [otherSources...]	Deploys static <source> to S3. Requires AWS_ACCESS
run [options]	Runs the local app through the router
rebuild [options] [apps...]	Trigger a rebuild of the latest master on Circle
test-urls [options] [app]	Tests that a given set of urls for an app respond a
ship [options]	Ships code. Deploys using pipelines, also running

n-heroku-tools

ADVERTENCIA: n-heroku-tools **nunca** debe ser instalado globalmente. Siempre instale como una 'devDependency' de su aplicación.

Para parches a **NBT 5** favor hacer PRs a la rama 'nbt-cinco' y liberar de allí.

```
Uso: n-heroku-tools [opciones] [comando]
```

n-heroku-tools

Esta biblioteca es una herramienta de línea de comandos que orquesta [Heroku](#) y despliegues de [Amazon S3](#) para [Next](#), con base en la configuración en el [registro de servicios de Next](#) y [Vault](#).

Instalación

Para instalar esta herramienta, ejecute:

```
npm install @financial-times/n-heroku-tools --save-dev
```

Uso

Los siguientes comandos están disponibles para uso con `n-heroku-tools` :

```
Uso: n-heroku-tools [opciones] [comando]
```

...

— contexto

— elaboración

— claridad

— **audiencia**

quién



Espectro de experiencia y comprensiónTM









elaborar sin juzgar



**entendemos el mundo
por medio de las palabras**

~~‘Todo lo que hay que hacer’~~

~~‘Apenas’~~

~~‘Obviamente’~~

~~‘Claramente’~~

~~‘Sencillamente’~~



~~**‘Todos saben’**~~

~~**‘Los programadores de verdad ...’**~~







- **reconocer nuestras suposiciones**
- **elaborar sin juzgar**
- **ofrecer espacio para sugerencias**
- **ponerle atención a nuestras palabras**



suposiciones





cuando paramos?



- **providenciar contexto**
- **elaborar libremente**
- **transmitir claridad**
- **estar conscientes de nuestras palabras**
- **invitar sugerencias**

Las palabras transforman tanto al hablante como al oyente, alimentan energía de ida y de vuelta, y la amplifican. Alimentan la comprensión y la emoción por ambos lados, y la amplifican.

Gracias

Gabrielle von Koss • @gvonkoss