

UMFASSENDES MONITORING MIT LOGS, METRIKEN, PINGS & TRACES

Philipp Krenn

@xeraa



Honest Status Page

@honest_update

 Follow



We replaced our monolith with micro services so that every outage could be more like a murder mystery.

RETWEETS

2,882

LIKES

2,256



4:10 PM - 7 Oct 2015



18



2.9K




2.3K





ALL THE THINGS!



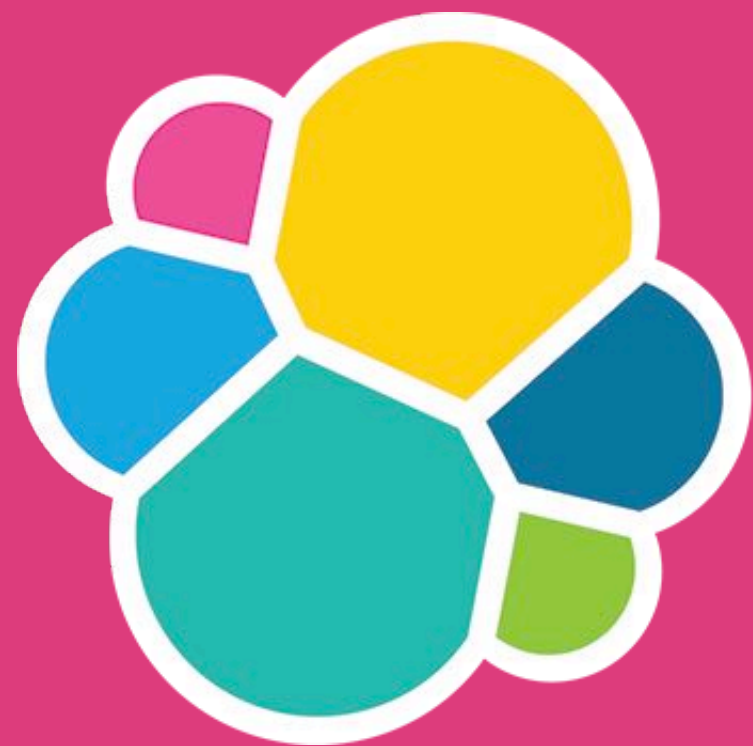

elastic

Developer 🥑

Disclaimer

I build **highly** monitored Hello World
apps

Code

<https://github.com/xeraa/microservice-monitoring>

APPLICATION



Simple

No discovery, load-balancing,...

IF ALL YOUR APIS HAVE SHORT NAMES,

THEN YOU HAVE MICROSERVICES

CLOUD





cloud



OPEN SOURCE





Kibana



Elasticsearch



Logstash



Beats



All instances 5

highio.classic 2

master.classic 1

aws.ml.m5 1

kibana.classic 1

eu-west-1a

**AWS.ML.M5**
Instance #32 v6.4.0
1 GB RAM
ml

Disk usage 0 MB of 2 GB

Stop routing

**HIGHIO.CLASSIC**
Instance #29 v6.4.0
2 GB RAM
data master ingest

JVM memory pressure 73% of 2 GB

Disk usage 24.87 GB of 48 GB

Stop routing

eu-west-1b

**HIGHIO.CLASSIC**
Instance #30 v6.4.0
2 GB RAM
data master eligible ingest

JVM memory pressure 39% of 2 GB

Disk usage 3.98 GB of 48 GB

Stop routing

**KIBANA.CLASSIC**
Instance #13 v6.4.0
1 GB RAM

eu-west-1c

**MASTER.CLASSIC**
Tiebreaker #31 v6.4.0
1 GB RAM
master eligible

JVM memory pressure 27% of 1 GB

Disk usage 0 MB of 24 GB

Stop routing

A low-angle, upward-looking shot of a white security camera mounted on a ceiling. The ceiling features a grid of fluorescent light fixtures, with one light glowing brightly. The camera is positioned in the center-left of the frame, pointing towards the right. The overall lighting is dim, with the primary light source being the overhead fluorescent lights.

MONITORING

Metricbeat: System

Packetbeat

<https://xeraa.wtf>

Metricbeat: nginx

Filebeat Modules

Filebeat + JSON

MDC, context, stack hash

Heartbeat

Metricbeat: HTTP

ID	Description	Sensitive Default
<code>actuator</code>	Provides a hypermedia-based “discovery page” for the other endpoints. Requires Spring HATEOAS to be on the classpath.	true
<code>autoconfig</code>	Displays an auto-configuration report showing all auto-configuration candidates and the reason why they ‘were’ or ‘were not’ applied.	true
<code>beans</code>	Displays a complete list of all the Spring beans in your application.	true
<code>configprops</code>	Displays a collated list of all <code>@ConfigurationProperties</code> .	true
<code>dump</code>	Performs a thread dump.	true
<code>env</code>	Exposes properties from Spring’s <code>ConfigurableEnvironment</code> .	true
<code>flyway</code>	Shows any Flyway database migrations that have been applied.	true
<code>health</code>	Shows application health information (when the application is secure, a simple ‘status’ when accessed over an unauthenticated connection or full message details when authenticated).	false
<code>info</code>	Displays arbitrary application info.	false
<code>liquibase</code>	Shows any Liquibase database migrations that have been applied.	true
<code>metrics</code>	Shows ‘metrics’ information for the current application.	true
<code>mappings</code>	Displays a collated list of all <code>@RequestMapping</code> paths.	true
<code>shutdown</code>	Allows the application to be gracefully shutdown (not enabled by default).	true
<code>trace</code>	Displays trace information (by default the last few HTTP requests).	true

Metricbeat: Jolokia

Time Series Visual Builder & Annotations




Auditbeat



APM

Application Performance Management / Monitoring



MORE



Name

Heap

Select an Index

metricbeat-*

Select a time field

@timestamp

Run this water

1

Broad searches can be done by adding * to your query

Matching the following condition

WHEN max() OF jolokia.metrics.memory.heap_usage.used GROUPED OVER 5 'beat.name' IS ABOVE 50000000 FOR THE LAST 5 minutes

beat.name (1 of 3): frontend.xeraa.wtf



* Gold license and Elastic Cloud

Alerts*

Name

Heap

Select an Index

metricbeat-*

Select a time field

@timestamp

Run this water


1

Broad searches can be done by adding * to your query

Matching the following condition

WHEN max() OF jolokia.metrics.memory.heap_usage.used GROUPED OVER top 5 'beat.name' IS ABOVE 50000000 FOR THE LAST 5 minutes

beat.name (1 of 3): frontend.xeraa.wtf

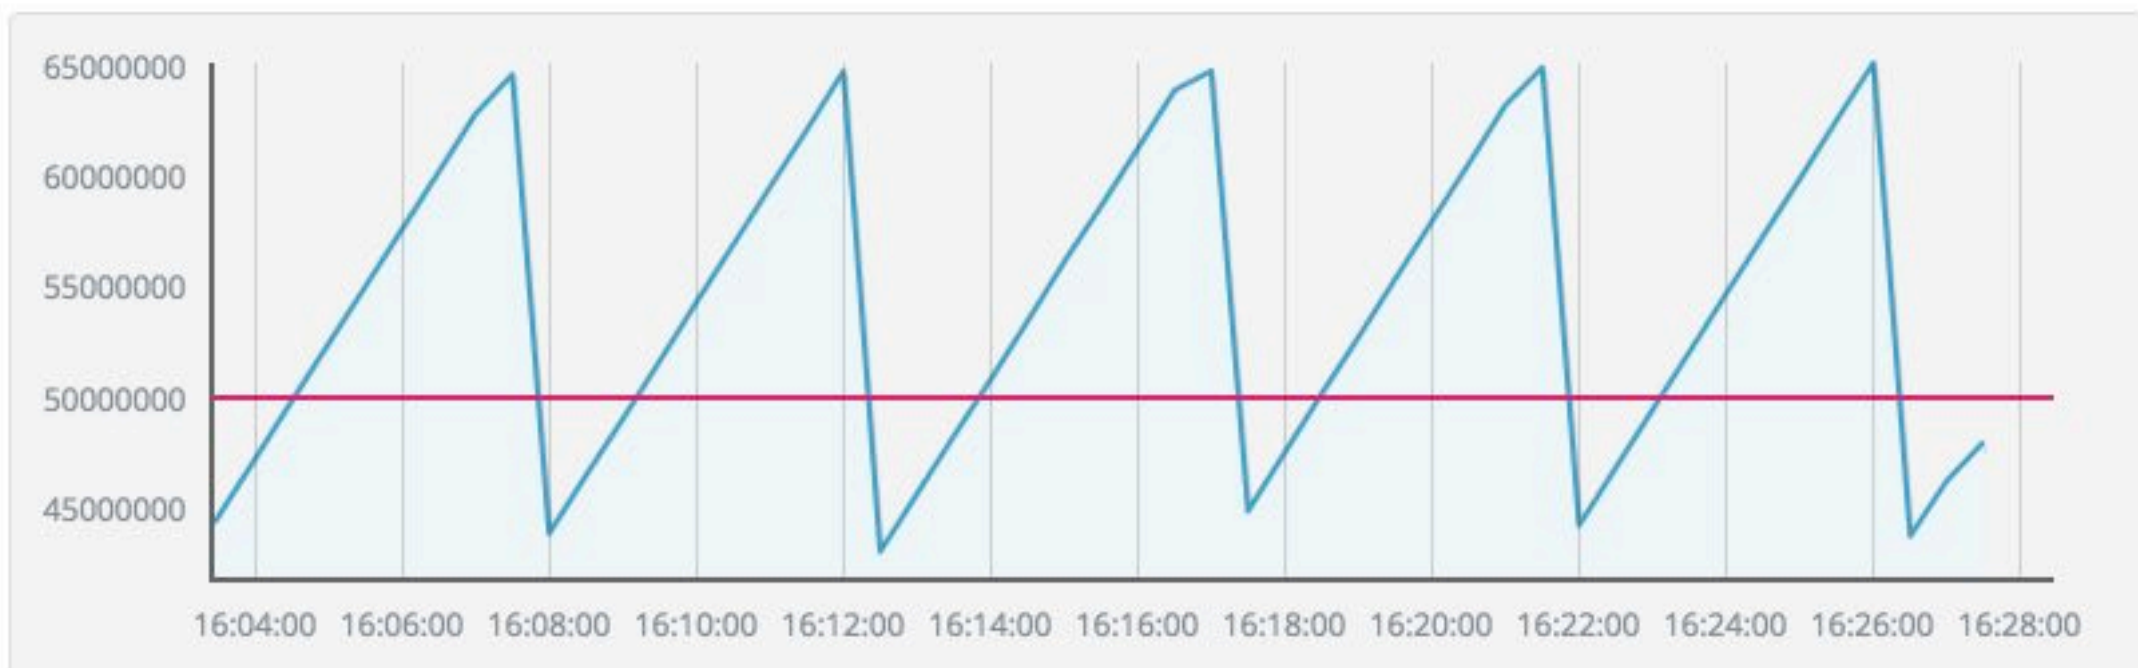


Job nginx-single

Detector: distinct_count (nginx.access.remote_ip)

Forecast

Single time series analysis of cardinality nginx.access.remote_ip

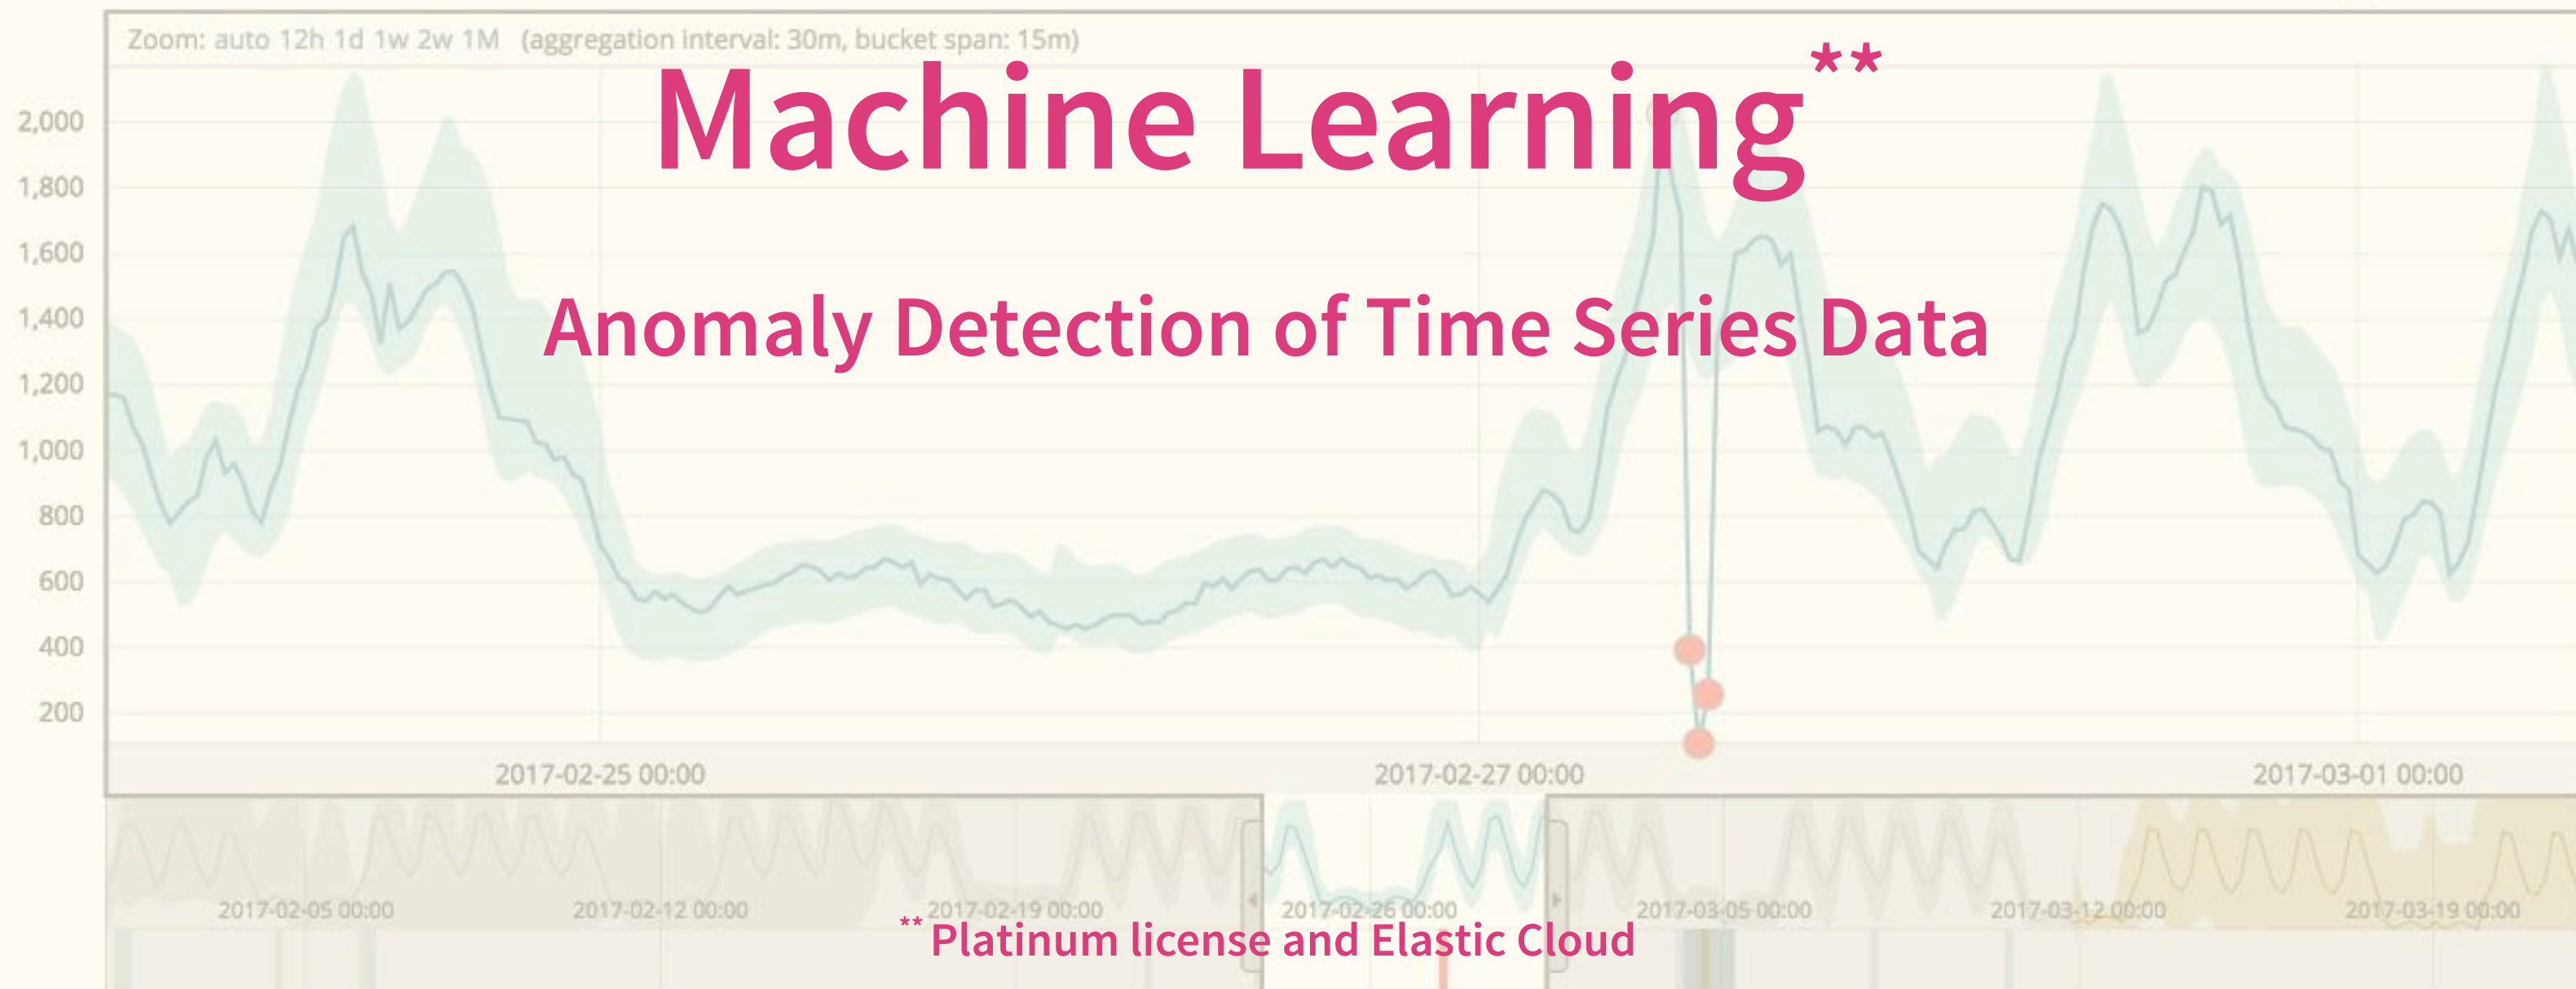
☒ show model bounds


Job nginx-single

Detector: distinct_count (nginx.access.remote_ip)

Forecast

Single time series analysis of cardinality nginx.access.remote_ip

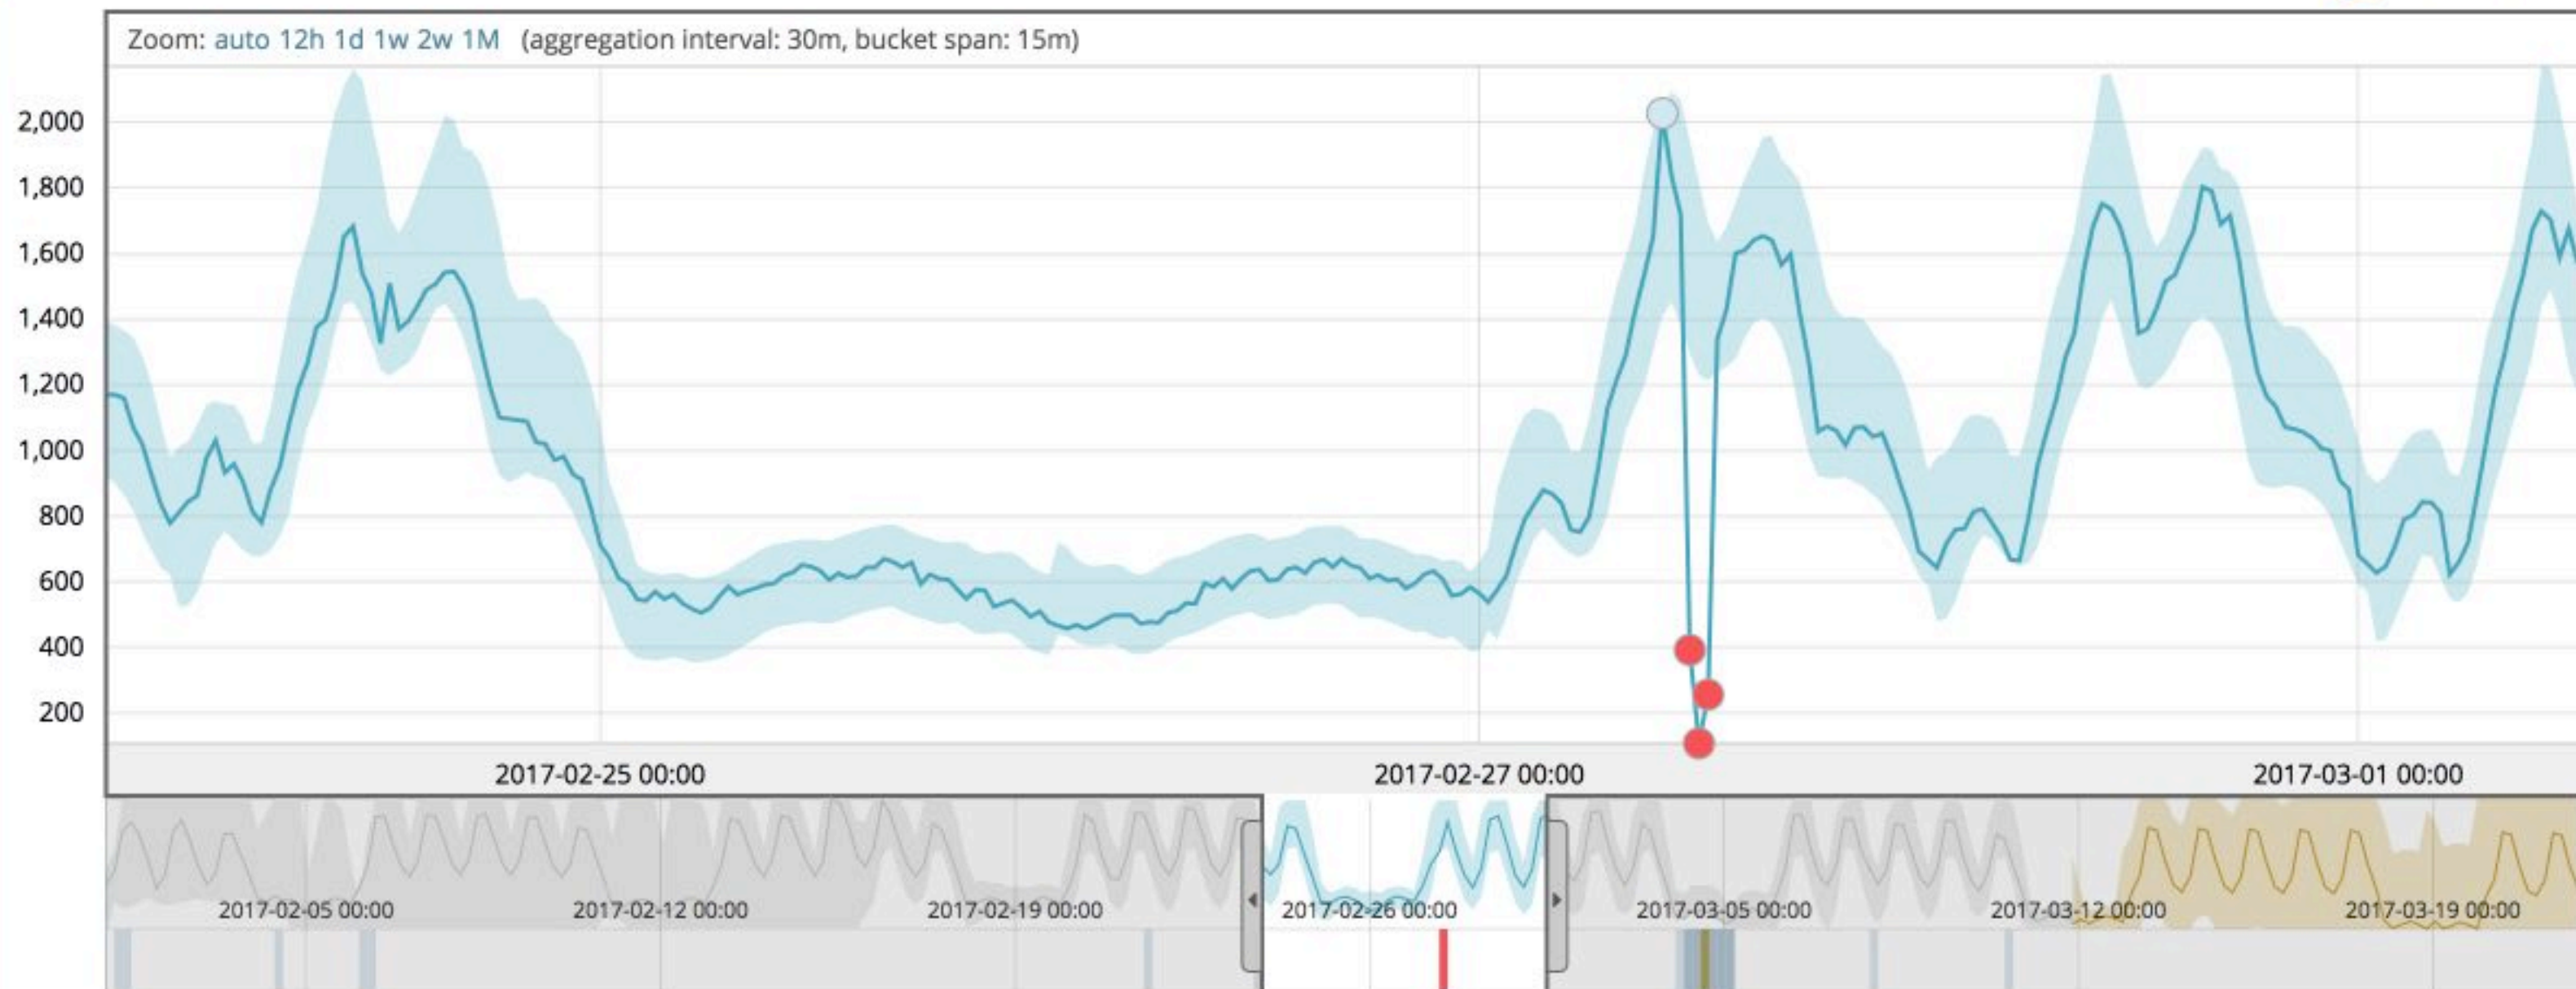☒ show model bounds

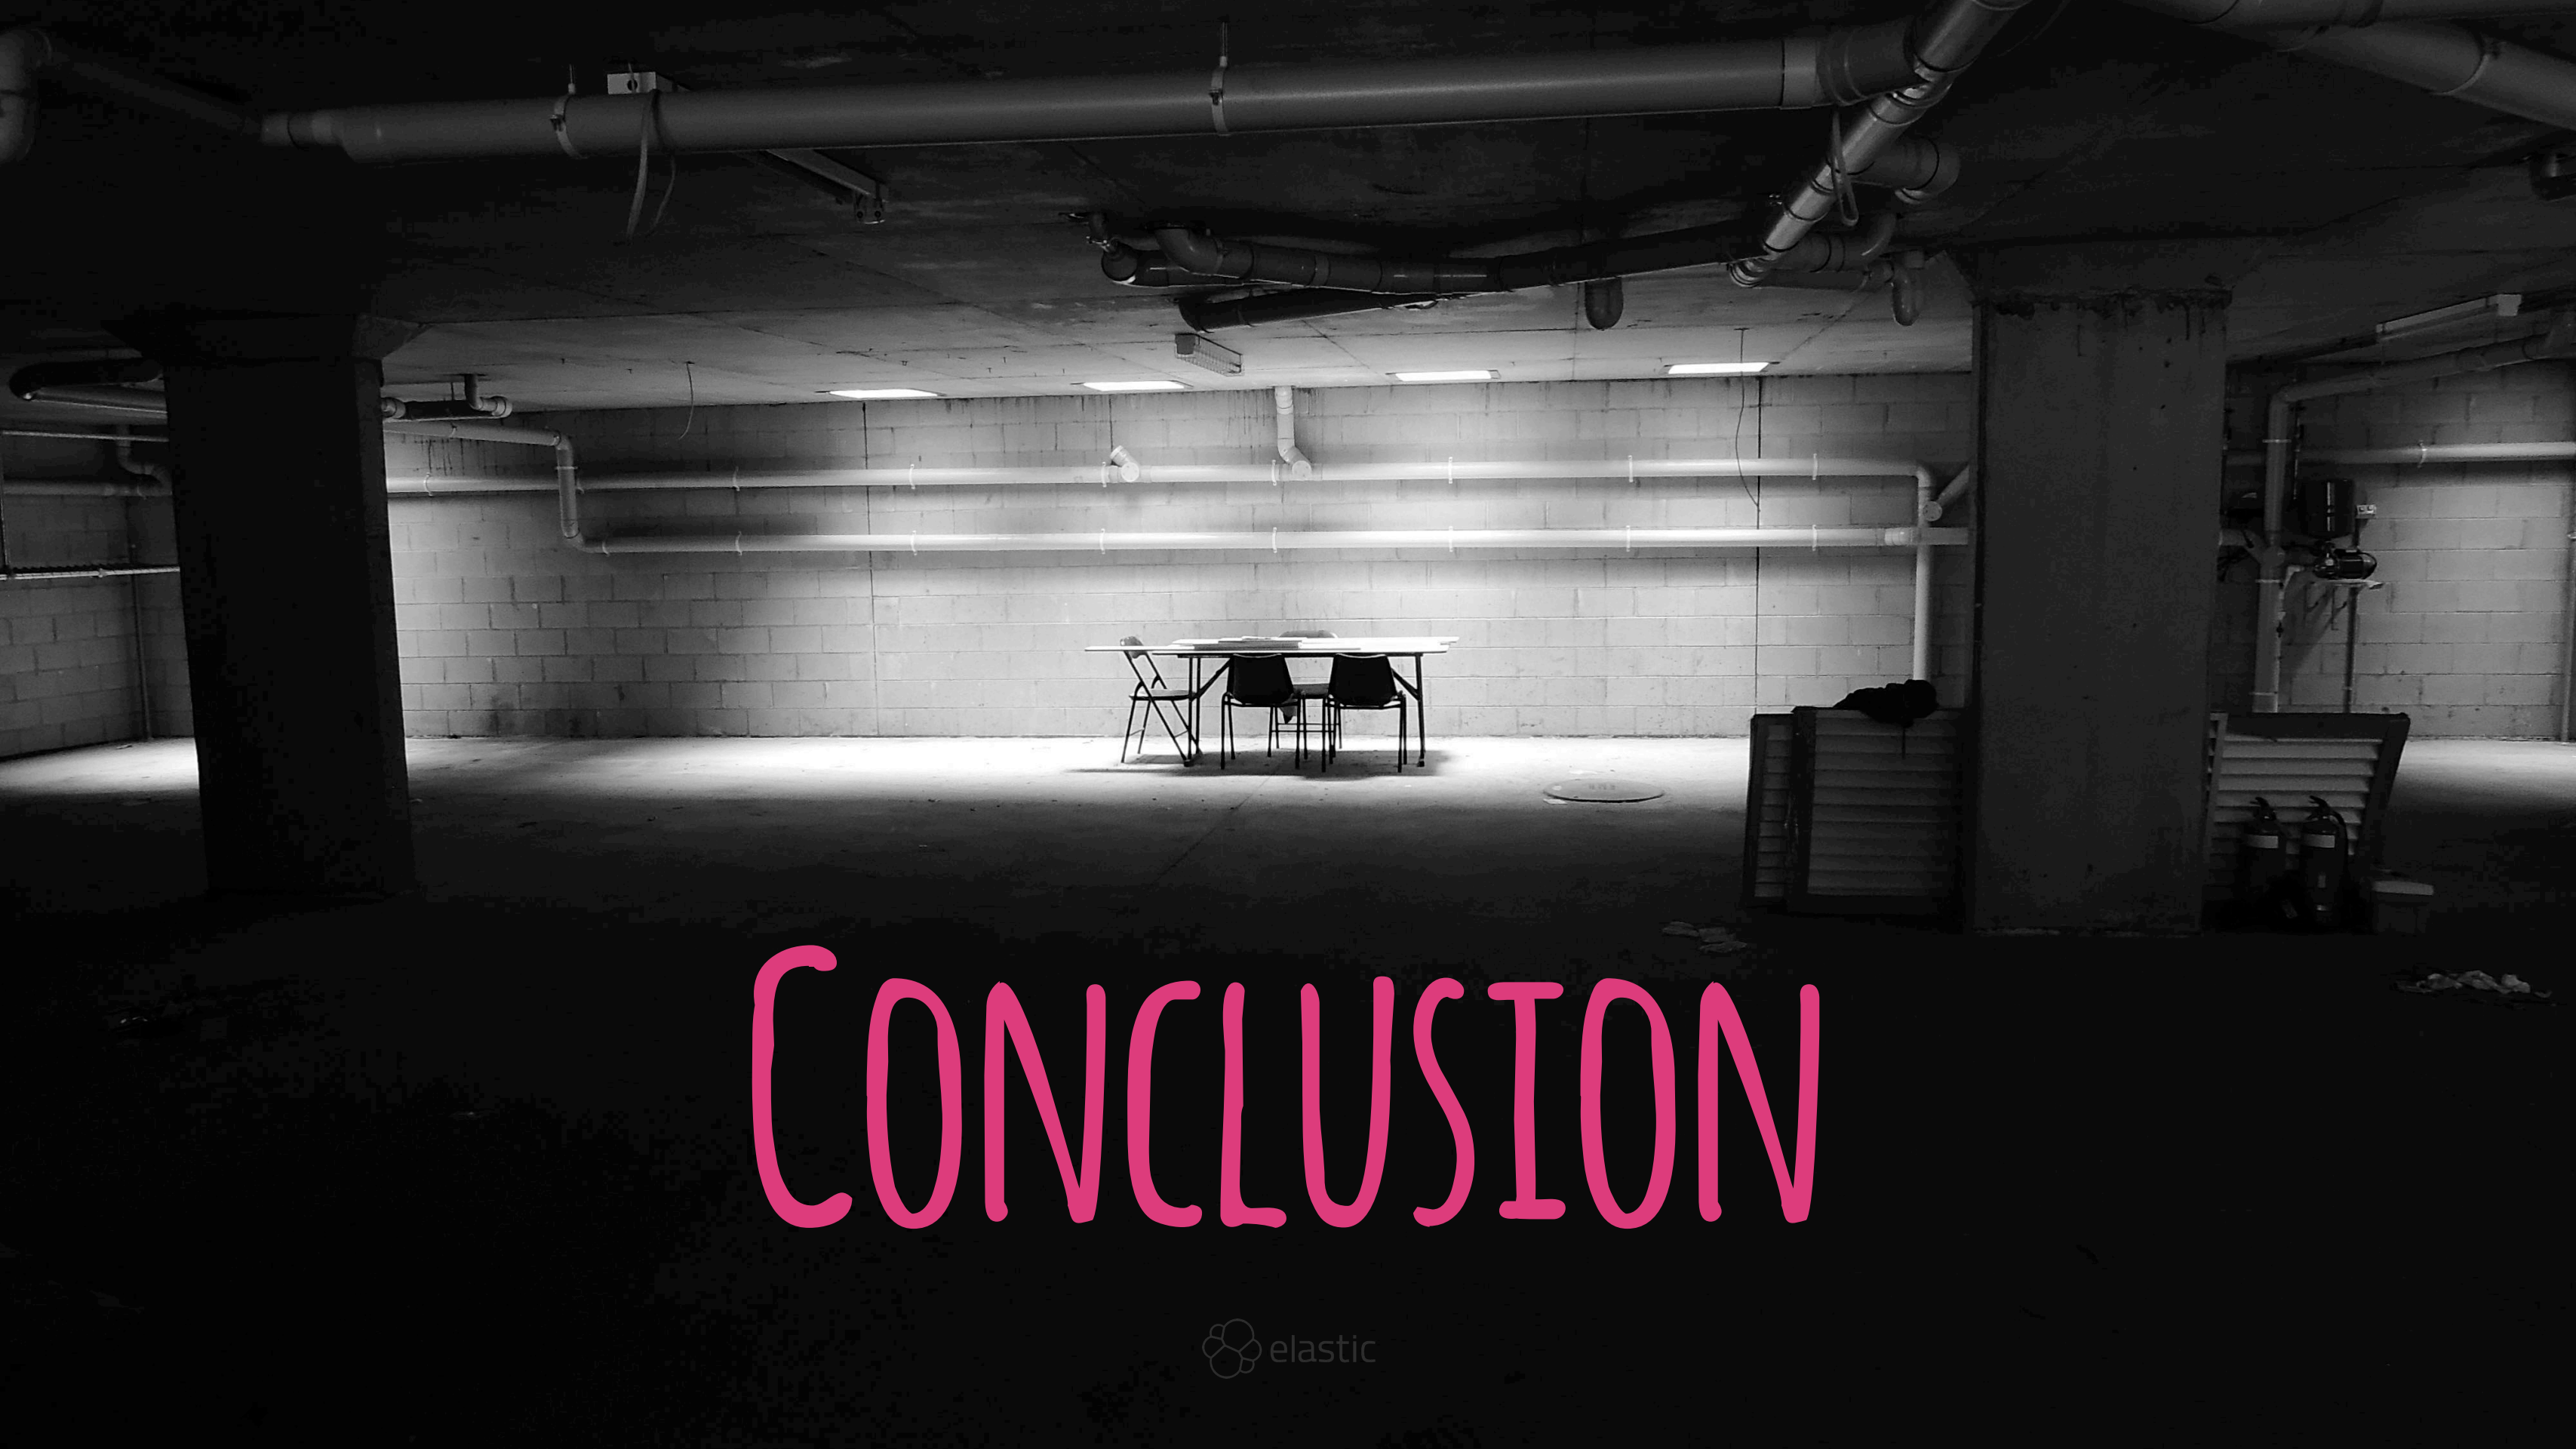A black and white photograph of a dimly lit, industrial-style room. The room has concrete walls and floors. In the center, there is a small table with four chairs. The room is filled with various pipes and conduits running along the walls and ceiling. The lighting is focused on the table area, creating a bright spot in the otherwise dark room.

CONCLUSION



System metrics & network

Filebeat modules & Auditbeat

Application logs

Uptime
Application metrics
Request tracing

Next

<https://dashboard.xeraa.wtf>

<https://github.com/xeraa/microservice-monitoring>

QUESTIONS?

Philipp Krenn

@xeraa

PS: Sticker